



Catalog Number	
Notes	Type

Lighting Control Systems

SYWR HHP

FEATURES

INTENDED USE

The SYWR HHP is a hand-held infrared transmitter that provides wireless remote control and the programming of dimming presets in a Synergy system. The SYWR HHP operates in conjunction with the infrared receiver that is ordered as an option on the SYRS digital remote station.

ATTRIBUTES

Buttons on the SYWR HHP transmitter can be configured to provide a variety of lighting control functions including on/off, preset recall, channel raise/lower and master raise/lower operation. Programming functions include setting individual preset fade times and saving preset scene levels.

CONSTRUCTION

The contoured thermoplastic housing is ergonomically designed for comfortable hand-held operation. Large soft-touch buttons provide simple operation.

FINISH

Gray housing with contrasting buttons.


ELECTRICAL

Power is provided by four AAA batteries which are provided with the unit.

WARRANTY

One-year total customer satisfaction warranty.


Hand-Held Programmer

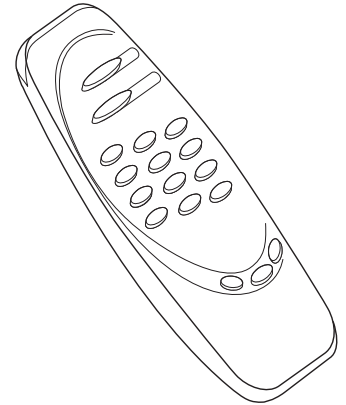

ORDERING INFORMATION

Example: **SYWR HHP**

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog number.

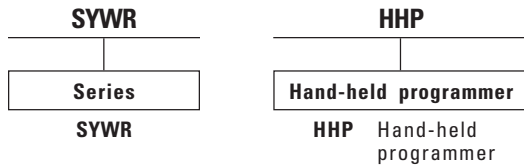


SYWR HHP Lighting Control System, Hand-Held Programmer

SPECIFICATIONS


POWER: Four AAA Alkaline batteries supplied.
IR CONTROL RANGE: 25 feet (7.5m).
LED CONTROL ANGLE: +/- 30 degrees.
OPERATING TEMPERATURE: -0 to 50°C.

DIMENSIONS



All dimensions are centimeters.

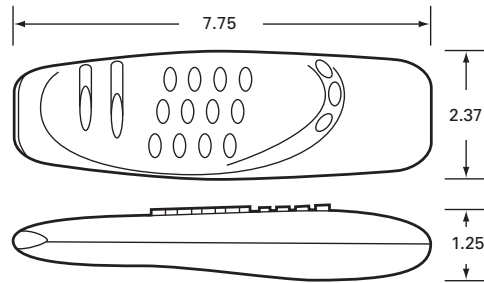

FUNCTIONAL

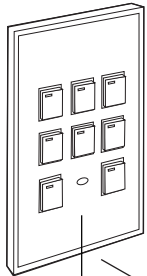

Optional IR receiver

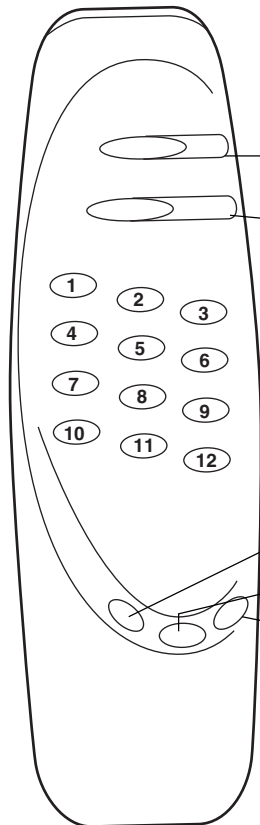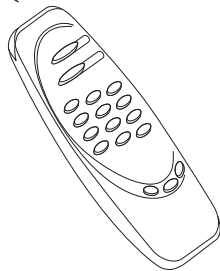

PLAYBACK FUNCTIONS

- On/Raise** *Press and release* to turn ON lighting, *press and hold* to raise the level of dimmed channels associated with the station.
- Off/Lower** *Press and release* to turn OFF lighting, *press and hold* to lower the level of dimmed channels associated with the station.
- Preset** *Press and release* to activate the preset scene associated with the button.
- Channel** *Press and release*, then select channels for manual raise/lower operation.

SAVING PRESETS

- Channel** *Press and release* the channel button, then select channel or channels 1-12 for raise/lower operation using the raise/lower buttons.
- Fade** *Press and release* to set the fade time for a preset. Available fade times are 0, 5, 10, 15, 30, 45, 60 seconds and 5, 10, 30, 60 minutes. *Press and hold* until the beep to save the fade time.
- Preset** *Press and release* the preset button, then choose the preset number 1-12 to save. *Press and hold* the preset button until the beep to save the preset.



An AcuityBrands Company