

Catalog Number	
Notes	Type

FEATURES & SPECIFICATIONS

INTENDED USE

Ideal for a wide variety of low- to medium-height ceiling applications including commercial, retail and hospitality spaces where a baffled fixture is required.

CONSTRUCTION

Utilizes an extruded socket housing that attaches to the reflector via key hole mount, which provides superior heat dissipation and extended lamp life. Socket housing also adjusts to accommodate varying lamp lengths.

Heavy-gauge, die-formed galvanized steel mounting frame. Attached to frame are vertically adjustable mounting brackets for use with C channels, 1/2" steel conduit or 16-gauge flat bar hangers included, standard. Frames are equipped with galvanized junction box UL Listed for through-wire applications. Junction boxes equipped with (2) 3/4" and (4) 1/2" conduit knockouts with pryout slots and removable access doors. Reflector clips packed with reflector for installation on rough-in.

Maximum 1-1/2" ceiling thickness.

OPTICS

Aluminum full reflectors are optically designed to maximize lumen output and to provide superior glare control. The black or white baffled reflectors have a semi-specular upper finish with white painted flange standard.

ELECTRICAL

Electronic ballast with end of lamp life protection standard. Class P thermally protected ballast protects against improper contact with insulation. Minimum starting temperature is 0°F/-18°C.

Rated for #12 AWG conductor thru-branch wiring. Minimum 90° supply wire. Ground wire provided.

Lamp Socket Base:

DTT 4-pin lamps – 13W (G24Q-1); 18W (G24Q-2); 26W (G24Q-3)


TRT 4-pin lamps – 13W (GX24Q-1); 18W (GX24Q-2); 26W & 32W (GX24Q-3); 42W (GX24Q-4)

LISTINGS


Fixtures are UL Listed for thru-branch wiring, Non-IC recessed mounting, damp location, and to U.S. and Canadian Safety Standards.

Compact Fluorescent Downlighting

6" LP6FN



BAFFLE
Vertical 1-Lamp, Double Twin-Tube (DTT) or Triple-Tube (TRT)

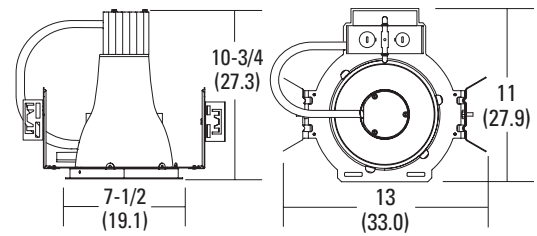

Specifications

Max. height: 10-3/4 (27.3)


Ceiling opening: 7 (17.8)

Overlap trim: 7-1/2 (19.1)

Length: 13 (33.0)

Width: 11 (27.9)

All dimensions are inches (centimeters).



ORDERING INFORMATION

For shortest lead times, configure product using **standard options (shown in bold)**.

Example: LP6FN 26-42TRT 6B9 MVOLT

LP6FN

Series	Wattage/lamp	Reflector/color ³	Voltage	Options ⁹
LP6FN	13DTT ¹	6B9 Black baffle 6B9W White baffle	MVOLT⁴	ADEZ Advance Mark 10™ electronic dimming ballast, 120V or 277V. Must be voltage specific. Minimum dimming level 5%
	18DTT			ECOS Lutron EcoSystem electronic dimming ballast, 120V - 277V. Must be wattage specific. Minimum dimming level 5%
	26DTT			EL Emergency PSDL3 DL battery pack with integral test switch⁶
	13TRT ¹		120	ELR Emergency PSDL3 DL battery pack with remote test switch⁶
	18TRT		277	ELHL Iota I-420-R High lumen output emergency battery pack. Internal test switch provided. Maximum average lumen output is 1300 (42W) ⁷
	26-42TRT²		347 ⁵	ELRHL Iota I-420-EM-B High lumen output emergency battery pack. Remote test switch provided. Maximum average lumen output is 1300 (42W) ⁷
	26TRT			GMF Single slow-blow fuse, must specify voltage
	32TRT			BDP Ballast disconnect plug (meets codes that require in-fixture disconnect) ⁵
	42TRT			RIF1 Radio interference filter
				NSD Sensor Switch nLight™ dimming relay ⁸
				WLP 35K lamp (shipped separately)

NOTES:

- Not available with ADEZ or ECOS.
- Not available with ECOS or WLP.
- White painted flange standard.
- Electronic multi-volt ballast capable of operating any line voltage from 120-277V, 50 or 60Hz.
- Not available with EL or ELR.
- Add 3" (7.6) to width and 4-1/2" (11.4) to length.
- Not recommended for field installation.
- One 5A relay with one 0-10 VDC dimming output, shipped installed. Requires additional nLight bus power supply.
- For additional options see lithonia.com.


Accessories

- Order as separate catalog number
- SCA6 Sloped ceiling adaptor. Degree of slope must be specified (10D, 15D, 20D, 25D, 30D) Ex: SCA6 10D.
 - CTE6 Ceiling thickness extender is used when ceiling thickness is greater than 1-1/2 (3.8). Maximum thickness 2 (5.1).


6" LP6FN Vertical 1-Lamp, Double Twin-Tube (DTT) or Triple Tube (TRT), Baffle

Distribution Curve Distribution Data Output Data Coefficient of Utilization


LP6FN 1/26TRT 6B9 MVOLT, (1) 26W TRT lamp, 1800 rated lumens, 1.0 s/mh, Test no. LTL10754

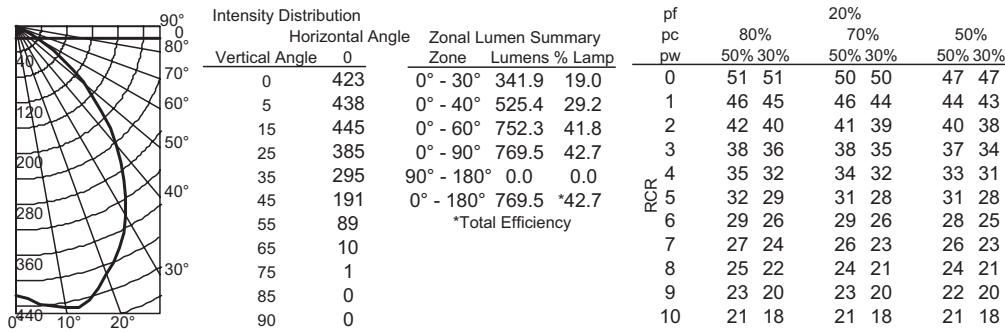

LP6FN 1/32TRT 6B9 MVOLT, (1) 32W TRT lamp, 2400 rated lumens, 1.0 s/mh, Test no. LTL10731

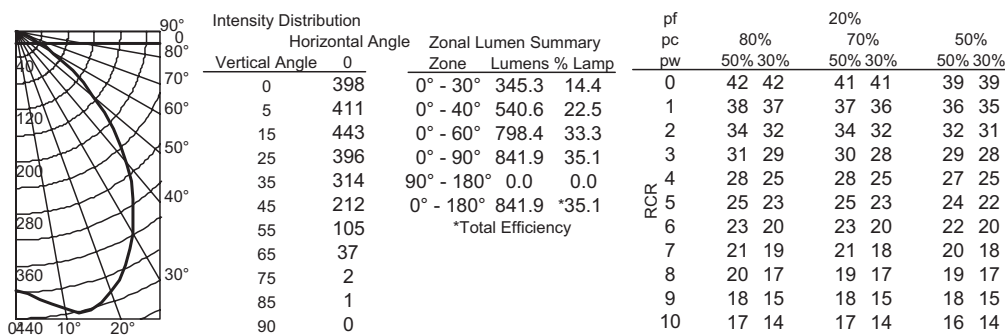

LP6FN 1/42TRT 6B9 MVOLT, (1) 42W TRT lamp, 3200 rated lumens, 1.1 s/mh, Test no. LTL10719

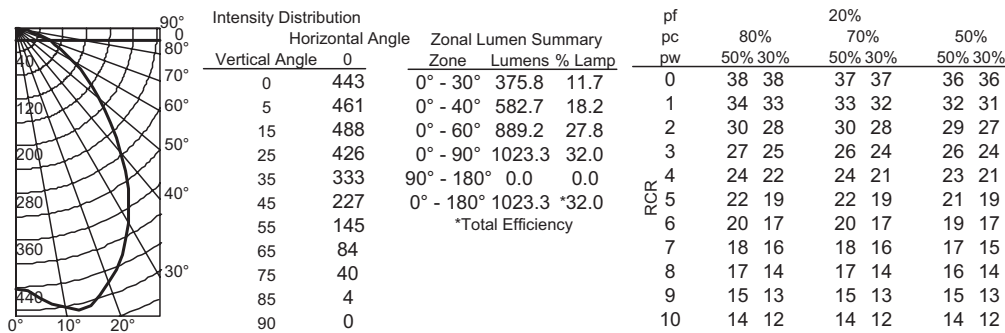

Lithonia Lighting
Recessed Downlighting and Track
 One Lithonia Way, Conyers, GA 30012
 Phone: 800-315-4935 Fax: 770-918-1209
 www.lithonia.com