



An Acuity Brands Company

4740 SERIES COMPACT FLUORESCENT

DESCRIPTION:

Hydrel's 4740 Compact Fluorescent lighting fixture brings fluorescent lamp performance to smaller outdoors applications. These are ideal for soft, even illumination within smaller planters, and along walls, and signs.

SPECIFICATIONS:

MATERIAL: Extruded aluminum with die cast aluminum end caps.

LAMP: One (1) Compact Fluorescent, 32 Watt Max. For 42 Watts please consult factory.

SOCKET: GX24Q 4 pin

VOLTAGE: See ordering guides.

DISTRIBUTIONS: WFL - Wide Flood

LENS: Polycarbonate.

MOUNTING: YM: Yoke Mount

BALLAST: Electronic multi-volt, 0°F(-18°C) minimum starting temperature.

CORD: Supplied with a minimum of 10' of 18-3 cable. Cord length must be specified.

ACCESSORIES : HVSR, full visor optional.

FINISH: See order guide for color options

FASTENERS: Stainless steel

LISTING: U.L., CUL

NOTE: HYDREL RESERVES THE RIGHT TO MODIFY SPECIFICATION WITHOUT NOTICE. Any dimension on this sheet is to be assumed as a reference dimension: "Used for information purposes only. It does not govern manufacturing or inspection requirements." (ANSI Y14.5-1973)

TYPE		JOB NAME			
PART NUMBER					
Model	Lamp Type	Voltage	Distribution	Mounting	Mounting Options
Accessories		CordSet Length	Lamp	Finish	Listing
APPROVALS					



An Acuity Brands Company

4740 ORDERING INFORMATION

60 Hz Application

Choose the boldface catalog nomenclature that best suits your needs.

PART NO. _____

EXAMPLE:

4740	32TRT	MVOLT	WFL	YM	ARJB	FVSR	CSL30	LPI	DDB
Model*		Voltage*		Mounting*		Accessories		Lamp	Finish*
<input type="checkbox"/> 4740		<input type="checkbox"/> MVOLT		<input type="checkbox"/> YM Yoke Mount		External <input type="checkbox"/> FVSR Full Visor <input type="checkbox"/> HVSR Half Visor <input type="checkbox"/> TPH Tamper Proof Hardware		<input type="checkbox"/> LPI Lamp Included	<input type="checkbox"/> BL Black <input type="checkbox"/> BZ Bronze <input type="checkbox"/> DDB Dark Bronze <input type="checkbox"/> DNA Natural Alum. <input type="checkbox"/> GN Green <input type="checkbox"/> GR Gray <input type="checkbox"/> SND Sand <input type="checkbox"/> STG Steel Gray <input type="checkbox"/> TVG Terra Verde Green <input type="checkbox"/> WH White <input type="checkbox"/> CF Custom Finish
	Lamp Type*								
	Fluorescent <input type="checkbox"/> 26TRT GX24Q-3 <input type="checkbox"/> 32TRT GX24Q-3								
			Distribution*						
			<input type="checkbox"/> WFL Wide Flood						
					Mounting Options				
					<input type="checkbox"/> ARJB Arch. J-Box <input type="checkbox"/> WMP Wall Mount Plate <input type="checkbox"/> WMSA Wall Mount with Splice Access <input type="checkbox"/> EWM_ Ext. Wall Mount <input type="checkbox"/> PSSA Pedestal Stanchion Mount <input type="checkbox"/> PMSA Pole Mount Splice Access <input type="checkbox"/> SMSA__ 12" - 48" Stanchion Mt, available in 6" increments <input type="checkbox"/> FJB Flush J-Box <input type="checkbox"/> PSS__ 18", 24" or 36" Polymer Sealed Ground Spike				
							Cord Set Length*		
							<input type="checkbox"/> CSL __ 10' - 50' of cord, available in 5' increments		

*Indicates required selection.

For shortest lead time, configure product using the **BOLD** options.



An Acuity Brands Company


4740 ORDERING INFORMATION

50 Hz Application

Choose the boldface catalog nomenclature that best suits your needs.

PART NO.

EXAMPLE:

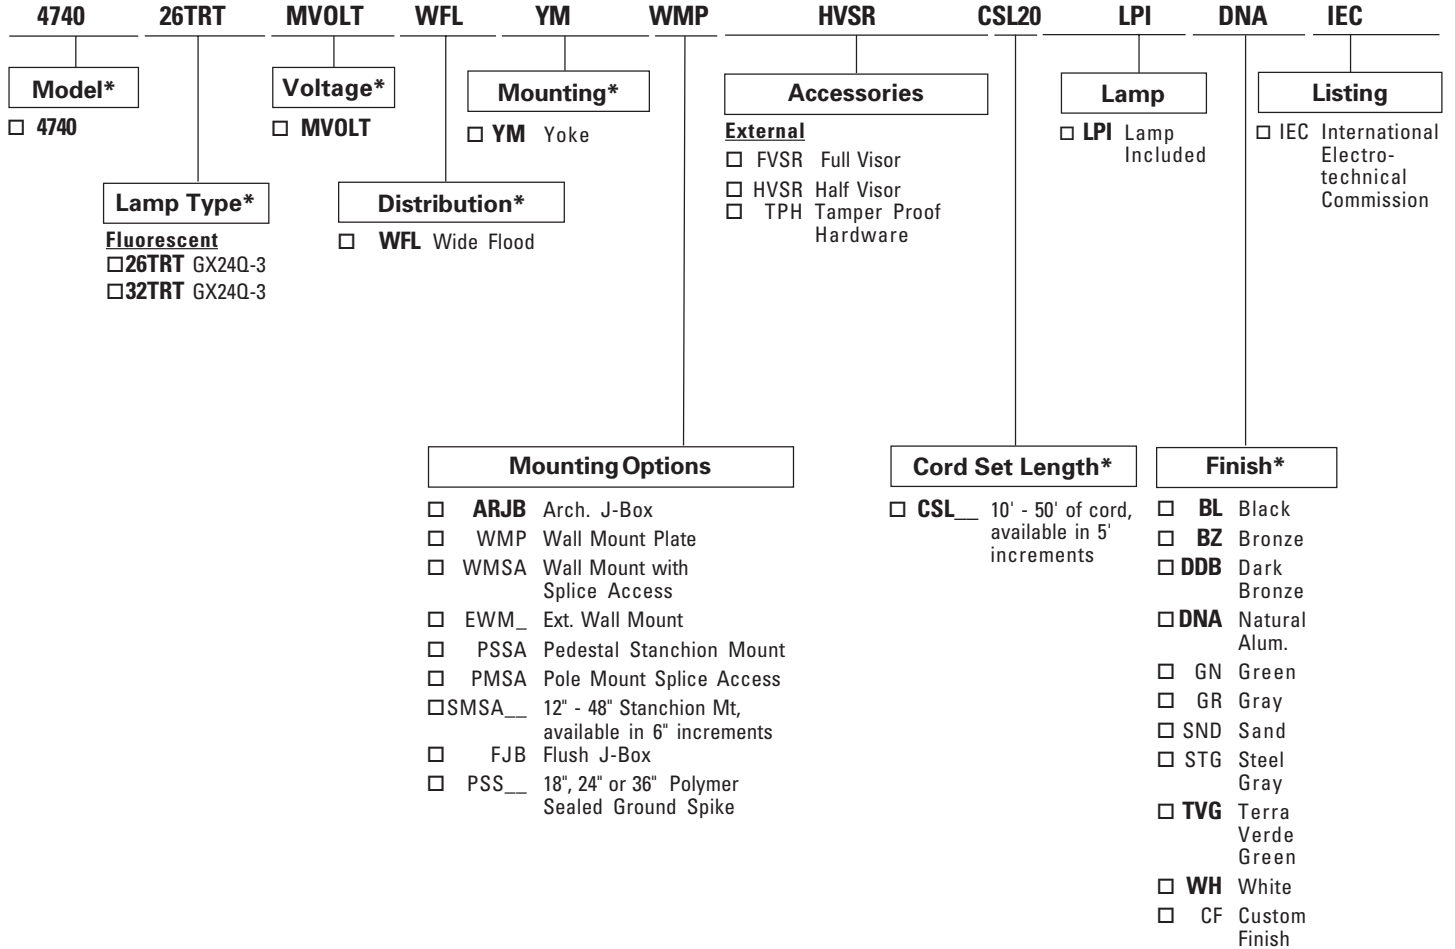

*Indicates required selection.

For shortest lead time, configure product using the **BOLD** options.