

Catalog Number	
Notes	Type

FEATURES

INTENDED USE

The Multi-Outlet Assembly is a prewired power receptacle outlet box that integrates with a RELOC system. The MOA can be used to manage phase loading on power receptacle applicatons.

CONSTRUCTION

Pin and socket contacts.

ELECTRICAL

Rated for use with 20A branch circuits.

All conductors are 12AWG.

All components provide a fully-rated 12AWG grounding conductor.

SYSTEM FEATURES

Supplied with 20A specification grade receptacles standard.

15A receptacles optional.

Male/female design allows removal of a device without additional components.

Color-coded labels for quick voltage identification.

Additional labeling properly denotes type and position of each conductor.

INSTALLATION

Box supplied with standard mounting straps.

Custom mounting brackets available.

LISTING

UL/CUL Listed.


WARRANTY

One year from the date of purchase.

RELOC® Wiring Solutions

MOA

Multi-Outlet Assembly

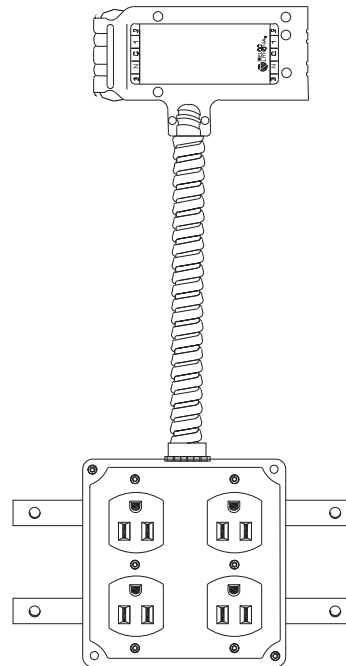

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: 2MOA PT12 20 E

MOA

Number of Duplex Receptacles ¹	Series	Voltage ²	Input connection ^{3,4}	Input connection length ⁵	Current rating	Device color	Options
2 up 12	MOA Multi-outlet assembly	(blank) 120	PT_ Power tee ^{5,7} DC_ Drop cable ^{5,7} CSU_ Circuit selector unit ⁶	(blank) No length 01 1 ft 03 3 ft 05 5 ft 09 9 ft 15 15 ft	15 15 Amps 20 20 Amps	A White B Brown C Ivory D Gray E Black F Orange ⁸	IGW Isolated ground wire 2N Two hots two neutrals

NOTES:

- Minimum number of duplex receptacles is 2, maximum is 12.
- Contact factory for other voltage options.
- Input Connections supplied with 5 conductors.
- Select the desired Input Connection. Specify the desired circuit (1, 2, 3) in any combination to supply to MOA and place in the space provided. (1 = Circuit #1, 2 = Circuit #2, 3 = Circuit #3, 12 = Circuits #1 and #2, etc...).
- Armoured cable standard for Input connections that require length (PT & DC).
- CSU has no length leave blank with ordering.
- If no length is selected for the PT or DC Input Connection, the armoured length will be 6 inches.
- Orange device color is for IGW option only.

MOA Multi-Outlet Assembly

SYSTEM VIEW

