



## FEATURES & SPECIFICATIONS

### INTENDED USE

The OnePass Cord-Unselectable (OCU) is a plug-in connection for industrial fixtures wired to the fixture in the field or pre-wired by Lithonia Lighting with a "HOCU" option. The OCU permits the removal of any fixture from the branch circuit without adding additional components or interrupting the branch circuit.

### ATTRIBUTES

Safety-keying prevents the mismatching of components with different voltages. Housing components are UL recognized connector bodies. Enclosure is #18 gauge zinc-plated CRS. Auto-latching springs prevent accidental disengagement. The OCU is resistant to most oils and greases.

### ELECTRICAL

Fixture cord is a #16AWG rubberized cord rated for 600V, 105°C temperature containing a fully rated ground conductor.

### LISTING


UL Listed to US and Canadian safety standards

Catalog Number	
Notes	Type

## Industrial Wiring System

# OCU

CORD –UNSELECTABLE

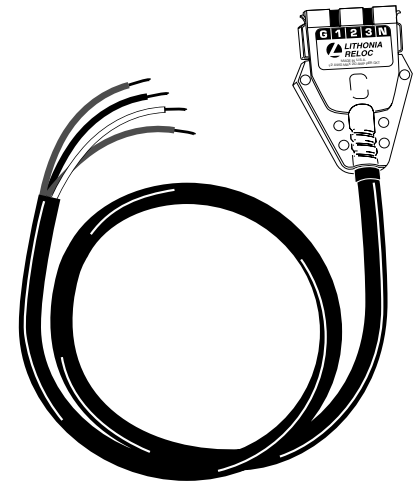

# OnePass®

## ORDERING INFORMATION

Example: **OCU 120 TAP2 10**

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog number.

OCU									
Series	Voltage		Conductor Tap		Length		Options		
<b>OCU</b>	<b>120</b>	120V	<b>TAP1</b>	Hot one <sup>1</sup>	<b>(Blank)</b>	3 feet	<b>2N</b>	Two circuits, two neutrals	
	<b>208</b>	208V <sup>5</sup>	<b>TAP2</b>	Hot two <sup>1</sup>	<b>5</b>	5 feet	<b>A</b>	Armor drop	
	<b>240</b>	240V <sup>5</sup>	<b>TAP3</b>	Hot three <sup>1</sup>	<b>10</b>	10 feet			
	<b>277</b>	277V	<b>TAP12</b>	Hot one and two	<b>15</b>	15 feet			
	<b>347</b>	347V	<b>TAP13</b>	Hot one and three	<b>20</b>	20 feet			
	<b>480</b>	480V <sup>5</sup>	<b>TAP23</b>	Hot two and three					
			<b>TAP34</b>	Hot three and four <sup>2</sup>					
			<b>TAP123</b>	TAP from position 1, 2 and 3 <sup>4</sup>					
			<b>1KW</b>	Hot one - Kilowatch <sup>1,3</sup>					
			<b>3KW</b>	Hot three - Kilowatch <sup>3</sup>					
			<b>13KW</b>	Hot one and three -Kilowatch <sup>3,4</sup>					


### NOTES:

- 1 Only available with 120V, 277V, 347V.
- 2 Only available with 208V, 240V, 480V.
- 3 Kilowatch only. Consult factory.
- 4 Armor only. Consult factory.
- 5 For use with 208V, 240V and 480V. Consult factory.

# OCU OnePass Cord-Unselectable

## Dimensions

All dimensions are inches (millimeters).

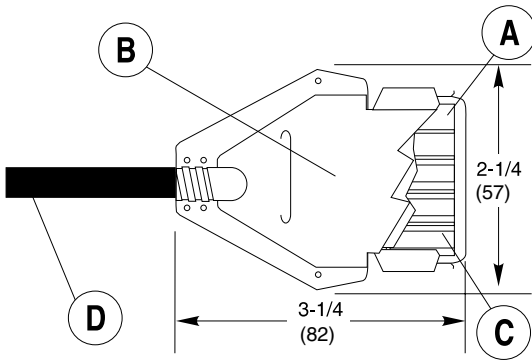

- A UL - recognized connector body
- B 18-gauge, zinc-plated, CRS enclosure
- C Tin-plated, copper contacts
- D Rubberized cord with #16AWG. Conductors rated at 600V, 105°C temperature rating and fully rated ground conductor.

## System View

