

Catalog Number	
Notes	Type

FEATURES

INTENDED USE

The RELOC panel kit enables the start of RELOC wiring system at the panel.

CONSTRUCTION

Pin and socket contacts

ELECTRICAL

Rated for use on 20A branch circuits.

All conductors are 12AWG branch circuits.

All components provide a fully-rated 12AWG grounding conductor.

SYSTEM FEATURES

Male/female design allows removal of a device without additional components.

Up to 14 starter units available for System 820 and OnePass

Up to 21 starter units available for Quick-Flex

Color-coded labels for quick voltage identification

Additional labeling properly denotes type and position of each conductor.

Each starter provided with 72" wire leads

INSTALLATION

Fits 1/2" trade size KO (.875" dia) on the electrical panel

LISTING

UL/CUL Listed


WARRANTY

One year from the date of purchase

RELOC® Wiring Solutions

RPK

RELOC Panel Kit

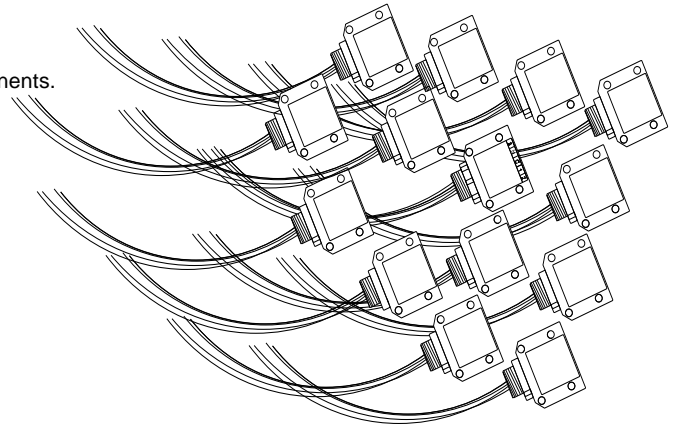

ORDERING INFORMATION

Choose the boldface nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog number.

For shortest lead times, configure product using **standard options (shown in bold)**.

Example: **RPK 120 OCNR**
RPK 120 OC2N

RPK		Voltage		Output Connection		Options	
Series							
RPK RELOC	120	120V		CD	System 820 circuit distributor ¹	NR	(Not Required) ⁴
Panel	208	208V		OC	OnePass converter ¹	2N	Two hot conductors with dedicated neutrals
Kit ⁵	277	277V		QC	Quick-Flex converter ²	IGW	Isolated ground wire
	347	347V					

Notes:

1. CD and OC each include 14 five-wire starters.
2. QC includes 21 four-wire starters.
3. 42 circuits available
4. NR option required if 2N and IGW option are not in the selection
5. Kits must be ordered in multiples of 14.

RPK RELOC Panel Kit

SYSTEM VIEW

