

Catalog Number	
Notes	Type

FEATURES

INTENDED USE

The Receptacle Strip is ideal for horizontal or vertical applications in gondolas, racks and customer care areas in retail, commercial and industrial facilities.

CONSTRUCTION

Enclosure dimensions are 1.5 x 1.75 x length.

Metal housing.

ELECTRICAL

120V multi-outlet AC power distribution for 15A and 20A circuits.

15A receptacle standard.

Frequency compatibility 50/60 Hz.

INSTALLATION

Integrate mounting tabs.

Mounts through housing supports; installaton on a variety of flat surfaces.

SYSTEM FEATURES

Pre-wired with RELOC devices.


Available with a cord and plug or stripped wires for hardwiring.

LISTING

UL-Approved

WARRANTY

One year from the date of purchase.

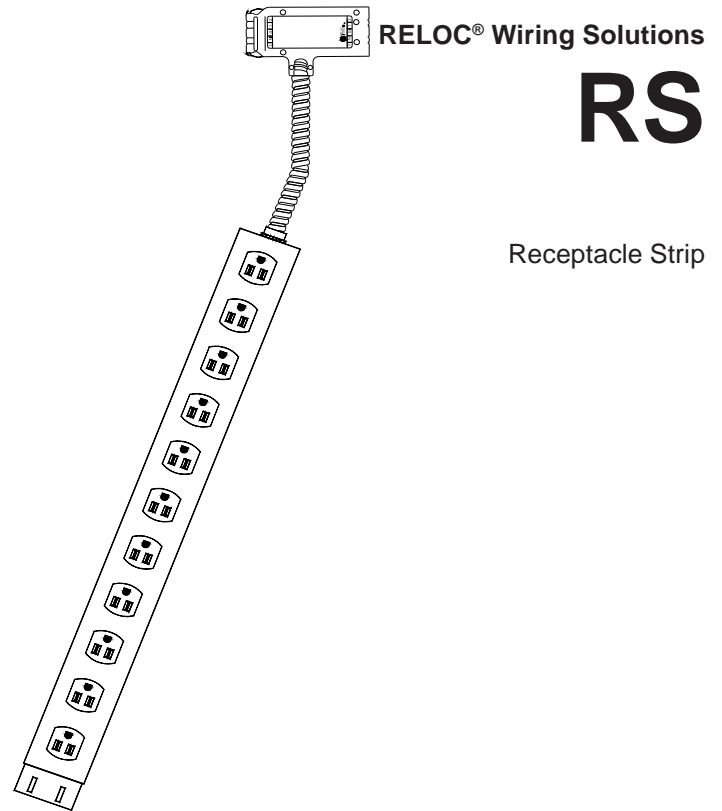

ORDERING INFORMATION

For shortest lead times, configure product using **standard options** (shown in bold).

Example: 12RS L48 PT105 CD BK

RS									
Number of Single Receptacles ¹	Series ²	Length	Voltage ³	Input connection ^{4,5,6}	Input connection length	Output connection ⁷	Finish	Option	
2	RS Receptacle Strip	L12 1 ft	(blank) 120V	DC_ Drop cable⁸	(blank) No length	CD System 820 circuit distributor	BK Black	IGW	
3		L24 2 ft	240 240V	PT_ Power tee⁸			WH White		
4		L36 3 ft	250 250V	CSU_ Circuit selector unit⁹	01 1 ft		GY Gray		
5		L48 4 ft			03 3 ft				
6		L60 5 ft			05 5 ft				
7		L72 6 ft		CP12_ 12AWG cord & plug	09 9 ft				
8		L84 7 ft		CP14_ 14AWG cord & plug	15 15 ft				
9		L96 8 ft							
10									
11									
12									

NOTES:

- Minimum number of single receptacles is 2, maximum number is 12.
- 15amp black receptacles are standard.
- Contact factory for other voltage options.
- Specify the desired circuit (1,2,3) in and combination and place in the space provided. (1 = circuit #1, 2 = circuit #2, 3 = circuit #3, 2 = circuits #1 and #2, etc...).
- All Input Connections supplied with 5 conductors standard.
- Input Connection not required if cord & plug Output Connection is selected.
- Output Connection cord color standard is black.
- Armoured cable standard for Input connections that require length (PT and DC).
- CSU does not have length.

RS Receptacle Strip

SYSTEM VIEW

