

# FEATURES

## OPTICAL SYSTEM

- Reflector - Self-flanged, semi-specular or matte-diffuse reflector. Fluted vertical upper section works in conjunction with patented Bounding Ray™ Optical Principle design (U.S. Patent No. 5,800,050) to provide lamp before lamp image and smooth transition from top of reflector to bottom. Minimum flange matches reflector finish.
- Baffle/cone - Semi-specular clear upper reflector. Microgroove baffle with white painted flange or specular black cone with flange that matches cone finish.
- Hinged lampdoor provided for optimal fixture efficiency and the reduction of stray light in the plenum.
- Wallwash – Highly reflective outer kicker reflector provides smooth, uniform illumination floor to ceiling, edge to edge. Inner cone is contoured to eliminate room side flash. For optimal uniformity, the recommended luminaire spacing is 0.9m (3') from the wall and 0.9m (3') centers.

## MECHANICAL SYSTEM

- Pre-wired galvanized steel junction box mounted to reflector is provided with removable access cover. No. 12 AWG conductors, rated for 90°C.
- Three (3) swinggate brackets allow for installation from below the ceiling. Suitable for ceiling thickness ranging from 1.59cm (5/8") to 2.54cm (1").

## ELECTRICAL SYSTEM

- Horizontally-mounted, positive-latch, thermoplastic socket.
- Thermally protected, high power factor electronic ballast (50/60Hz) mounted to the junction box.
- Eurostyle terminal block included for power supply and ground connections required for CE.

## LISTING

- MVOLT, 120V and 277V fixtures are UL Listed, Non-IC recessed mounting and damp locations. 220V and 240V fixtures are CE certified and rated IP20.

Type

Catalog number

.....

.....

## International Compact Fluorescent Downlight/Wallwash

# AFI/AFWI


20.3cm (8")

Open/Wallwash




Horizontal DTT or TRT Lamp



UL Listed

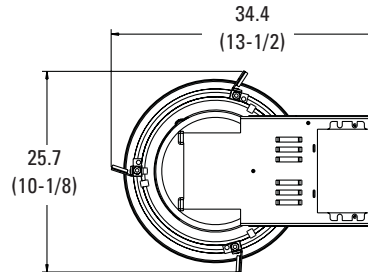

CE Certified

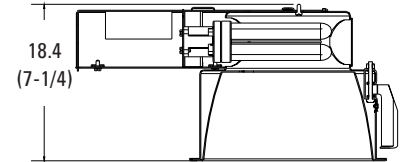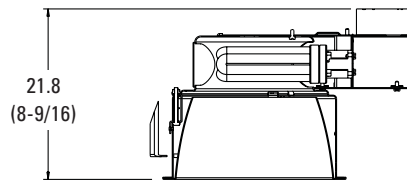

All dimensions are centimeters (inches)

Aperture: 20.1 (7-7/8)  
Ceiling Opening: 21.9 (8-5/8)  
Overlap Trim: 23.5 (9-1/4)

# ORDERING INFORMATION

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog numbers (shipped separately).

Example: **AFI 2/32TRT 8AR 220**

Series	Wattage/Lamp	Aperture/Trim color	Finish	Voltage	Ballast	Options
<b>AFI</b>	<b>1/13DTT</b>	<b>8AR</b> Clear	(blank) Semi-specular	<b>MVOLT<sup>3,5</sup></b>	<b>(blank)</b> Electronic ballast	<b>TRW</b> White painted flange
<b>AFWI</b>	<b>1/18DTT</b>	<b>8PR</b> Pewter	<b>LD</b> Matte-diffuse	<b>120<sup>6</sup></b>	<b>ADEZ<sup>6</sup></b> Advance Mark 10™ electronic dimming ballast. Minimum dimming level 5%	<b>TRBL</b> Black painted flange
	<b>1/26DTT</b>	<b>8WTR</b> Wheat		<b>220<sup>4</sup></b>	<b>ADZT<sup>6</sup></b> Advance Mark 7™ electronic 0-10V DC dimming ballast. Minimum dimming level 3%	<b>WLP</b> With 3500°K lamp (shipped separately)
	<b>1/13TRT</b>	<b>8CB<sup>1,2</sup></b> Cross baffle		<b>240<sup>4</sup></b>	<b>ECOS</b> Lutron EcoSystem™ electronic dimming ballast. Minimum dimming level 5%	<b>GMF</b> Single, slow-blow fuse.
	<b>1/18TRT</b>	<b>8BC<sup>1,2</sup></b> Black cone		<b>277<sup>5</sup></b>	<b>VDB<sup>7</sup></b> Vossloh 0-10V dimming ballast	<b>GLR</b> Single, fast-blow fuse.
	<b>1/26TRT</b>	<b>8WR<sup>1,2</sup></b> White painted				<b>GSKT</b> Foam gasketing, ships uninstalled
	<b>1/32TRT</b>					
	<b>1/42TRT</b>					
	<b>2/13TRT</b>					
	<b>2/18TRT</b>					
	<b>2/26TRT</b>					
	<b>2/32TRT</b>					
	<b>2/42TRT</b>					

### NOTES

- 1 Not available with finishes.
- 2 AFI only.
- 3 Multi-volt electronic ballast capable of operating on any line voltage from 120 through 277V, 50 or 60Hz.
- 4 Available with CE listing only. 220-240V, 50/ 60 Hz.
- 5 Available with UL listing only. 120-277V, 50/60Hz.
- 6 Available with 120V or 277V only.
- 7 Available with 220V or 240V only.



GOTHAM ARCHITECTURAL DOWNLIGHTING  
1400 Lester Road Conyers Georgia 30012  
P 800 315 4982 F 770 860 3129  
www.gothamlighting.com

AFI 8 TRT OPEN

DCF-180-I

# 20.3cm (8") AFI Open Reflector

Distribution curve    Distribution data    Output data    Coefficient of utilization    Illuminance Data at 30" Above Floor for a Single Luminaire

**AFI 1/32TRT 8AR, (1) CF32DT/E/IN/835, 2400 lumens per lamp, 1.3 s/mh, Test no. LTL9452**

Mount height	Initial fc at beam center	50% beam angle 61.0°		10% beam angle 94.7°	
		Beam diameter	fc at beam edge	Beam diameter	fc at beam edge
		Beam diameter	fc at beam edge	Beam diameter	fc at beam edge
8'	33.2	6.5	16.6	11.9	3.3
10'	17.9	8.8	8.9	16.3	1.8
12'	11.1	11.2	5.6	20.6	1.1
14'	7.6	13.5	3.8	25.0	0.8
16'	5.5	15.9	2.8	29.3	0.6

**AFI 1/42TRT 8AR, (1) CF42DT/E/IN/835, 3200 lumens per lamp, 1.3 s/mh, Test no. LTL9455**

Mount height	Initial fc at beam center	50% beam angle 64.5°		10% beam angle 94.8°	
		Beam diameter	fc at beam edge	Beam diameter	fc at beam edge
		Beam diameter	fc at beam edge	Beam diameter	fc at beam edge
8'	42.8	6.9	21.4	12.0	4.3
10'	23.0	9.5	11.5	16.3	2.3
12'	14.3	12.0	7.2	20.7	1.4
14'	9.8	14.5	4.9	25.0	1.0
16'	7.1	17.0	3.6	19.3	0.7

**AFI 2/32TRT 8AR, (2) CF32DT/E/IN/835, 2400 lumens per lamp, 1.4 s/mh, Test no. LTL9407**

Mount height	Initial fc at beam center	50% beam angle 67.9°		10% beam angle 94.3°	
		Beam diameter	fc at beam edge	Beam diameter	fc at beam edge
		Beam diameter	fc at beam edge	Beam diameter	fc at beam edge
8'	52.4	7.4	26.2	11.9	5.2
10'	28.2	10.1	14.1	16.2	2.8
12'	17.6	12.8	8.8	20.5	1.8
14'	12.0	15.5	6.0	24.8	1.2
16'	8.7	18.2	4.3	29.1	0.9

**AFI 2/42TRT 8AR, (2) CF42DT/E/IN/835, 3200 lumens per lamp, 1.4 s/mh, Test no. LTL9406**

Mount height	Initial fc at beam center	50% beam angle 67.6°		10% beam angle 94.1°	
		Beam diameter	fc at beam edge	Beam diameter	fc at beam edge
		Beam diameter	fc at beam edge	Beam diameter	fc at beam edge
8'	73.1	7.4	36.5	11.8	7.3
10'	39.3	10.0	19.7	16.1	3.9
12'	24.5	12.7	12.2	20.4	2.4
14'	16.7	15.4	8.4	24.7	1.7
16'	12.1	18.1	6.1	29.0	1.2

**NOTES:**

- For electrical characteristics, refer to Technical Bulletins tab.
- Tested to current IES and NEMA standards under stabilized laboratory conditions. Various operating factors can cause differences between laboratory data and actual field measurements. Dimensions and specifications are based on the most current available data and are subject to change without notice.
- Consult factory or IES file for microgroove baffle, black cone and other photometric reports.

**DLCF-180-I**

©2010 Acuity Brands Lighting, Inc. All Rights Reserved.

Rev. 6/11



GOTHAM ARCHITECTURAL DOWNLIGHTING

1400 Lester Road Conyers Georgia 30012

P 800 315 4982 F 770 860 3129

www.gothamlighting.com