

FEATURES

OPTICAL SYSTEM

- Self-flanged, semi-specular or matte-diffuse reflector. Patented Vertisys® - Bounding Ray™ Optical Principle design (US Patent #5,800,050) provides lamp before lamp image. Lamp image that reflects smoothly from the top of the reflector to the aperture, providing optimal fixture performance and efficiency.
- Wallwash – Highly reflective outer kicker reflector provides smooth, uniform illumination floor to ceiling, edge to edge. Inner cone is contoured to eliminate room side flash. For optimal uniformity, the recommended luminaire spacing is 0.9m (3') from the wall and 0.9m (3') centers.

MECHANICAL SYSTEM

- Pre-wired galvanized steel junction box mounted to reflector is provided with removable access cover. No. 12 AWG conductors, rated for 90°C.
- Three (3) swinggate brackets allow for installation from below the ceiling. Suitable for ceiling thickness ranging from 1.59cm (5/8") to 2.54cm (1").

ELECTRICAL SYSTEM

- Rugged aluminum lampholder housing.
- Vertically-mounted, positive-latch, thermoplastic socket.
- Thermally protected, high power factor electronic ballast (50/60Hz) mounted to the junction box.
- Eurostyle terminal block included for power supply and ground connections required for CE.

LISTING

- MVOLT, 120V and 277V fixtures are UL Listed, Non-IC recessed mounting and damp locations. 220V and 240V fixtures are CE certified and rated IP20.





Type

Catalog number



International Compact Fluorescent Downlights/Wallwash AFVI/AFVWI

15.2cm (6")
Open/Wallwash
Vertical DTT or TRT Lamp

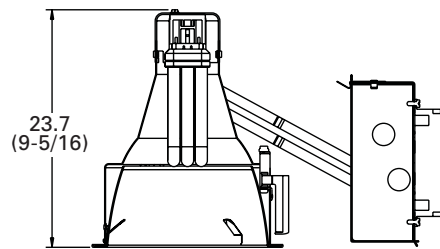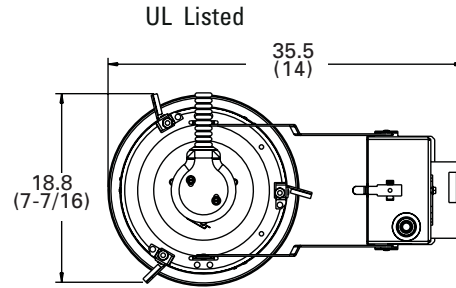

All dimensions are centimeters (inches)

Aperture: 15.9 (6-1/4)
Ceiling opening: 17.5 (6-7/8)
Overlap trim: 19.1 (7-1/2)

ORDERING INFORMATION

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog numbers (shipped separately).

Example: **AFVI 32TRT 6AR 240**

Series	Wattage/Lamp	Aperture/Trim color	Finish	Voltage	Ballast	Options
AFVI	13DTT	6AR Clear	(blank) Semi-specular	MVOLT^{3,5}	(blank) Electronic ballast	TRW White painted flange
AFVWI	18DTT	6PR Pewter	LD Matte-diffuse	120⁵	ADEZ⁶ Advance Mark 10™ electronic dimming ballast. Minimum dimming level 5%	TRBL Black painted flange
	26DTT	6WTR Wheat		220⁴	ADZT⁶ Advance Mark 7™ electronic 0-10V DC dimming ballast. Minimum dimming level 3%	WLP With 3500°K lamp (shipped separately)
	13TRT	6WR^{1,2} White painted		240⁴	ECOS Lutron EcoSystem™ electronic dimming ballast. Minimum dimming level 5%	GMF Single, slow-blow fuse.
	18TRT			277⁵	VDB⁷ Vossloh 0-10V dimming ballast	GLR Single, fast-blow fuse.
	26TRT					GSKT Foam gasketing, ships uninstalled
	32TRT					
	42TRT					

NOTES

- 1 Not available with finishes.
- 2 AFI only.
- 3 Multi-volt electronic ballast capable of operating on any line voltage from 120 through 277V, 50 or 60Hz.
- 4 Available with CE listing only. 220-240V, 50/60 Hz.
- 5 Available with UL listing only. 120-277V, 50/60Hz.
- 6 Available with 120V or 277V only.
- 7 Available with 220V or 240V only.

15.2cm (6") AFVI/AFVWI Open Reflector

Distribution curve Distribution data Output data Coefficient of utilization Illuminance Data at 30" Above Floor for a Single Luminaire

AFVI 26TRT 6AR, (1) PL-T 26W/30/4P lamp, 1800 rated lumens, 1.2 s/mh, Test No. 94021501

Distribution curve	Distribution data		Output data		Coefficient of utilization			Illuminance Data at 30" Above Floor for a Single Luminaire										
	From 0°	Ave Lumens	Zone Lumens	%lamp	pf pc	80%		20%		50% beam angle 63.7°		10% beam angle 93.3°						
					pw	50%	30%	50%	30%	50%	30%	Beam diameter	fc at beam edge	Beam diameter	fc at beam edge			
	0°	676	0°-30°	559.4	31.1	1	66	65	65	63	62	61						
	5°	706	0°-40°	871.9	48.4	2	61	58	60	57	58	56						
	15°	704	0°-60°	1085.5	60.3	2	61	58	60	57	58	56						
	25°	639	0°-90°	1085.7	60.3	3	56	53	55	52	53	51						
	35°	505	90°-180°	0	0.0	4	51	48	51	47	49	46						
	45°	269	0°-180°	1085.7	60.3*	5	47	43	47	43	46	42	8'	22.3	6.8'	11.2	11.7'	2.2
	55°	4				6	44	40	43	39	42	39	10'	12.0	9.3'	6.0	15.9'	1.2
	65°	0				7	41	36	40	36	39	36	12'	7.5	11.8'	3.7	20.1'	0.7
	75°	0				8	38	34	37	33	37	33	14'	5.1	14.3'	2.6	24.4'	0.5
	85°	0				9	35	31	35	31	34	31	16'	3.7	16.8'	1.9	28.6'	0.4
	90°	0				10	33	29	32	29	32	28						

AFVI 32TRT 6AR, (1) PL-T 32W/30/4P lamp, 2400 rated lumens, 1.1 s/mh, Test No. 17111

Distribution curve	Distribution data		Output data		Coefficient of utilization			Illuminance Data at 30" Above Floor for a Single Luminaire										
	From 0°	Ave Lumens	Zone Lumens	%lamp	pf pc	80%		20%		50% beam angle 54.6°		10% beam angle 89.4°						
					pw	50%	30%	50%	30%	50%	30%	Beam diameter	fc at beam edge	Beam diameter	fc at beam edge			
	0°	1146	0°-30°	787.2	54.7	1	66	64	65	63	62	61						
	5°	1150	0°-40°	1177.5	49.1	2	61	58	60	57	58	56						
	15°	1012	0°-60°	1430.1	59.6	2	61	58	60	57	58	56						
	25°	861	0°-90°	1438.3	59.9	3	56	53	55	52	53	51						
	35°	631	90°-180°	0	0.0	4	52	48	51	47	49	47						
	45°	308	0°-180°	1438.3	59.9*	5	48	44	47	43	46	43	8'	37.9	5.7'	18.9	10.9'	3.8
	55°	20				6	44	40	44	40	43	39	10'	20.4	7.7'	10.2	14.8'	2.0
	65°	6				7	41	37	41	37	40	36	12'	12.7	9.8'	6.4	18.8'	1.3
	75°	2				8	38	34	38	34	37	34	14'	8.7	11.9'	4.3	22.8'	0.9
	85°	0				9	36	32	35	32	35	31	16'	6.3	13.9'	3.1	26.7'	0.6
	90°	0				10	33	29	33	29	33	29						

AFVI 32TRT 6MB, (1) PL-T 32W/30/4P lamp, 2400 rated lumens, 1.0 s/mh, Test no. 2196071001

Distribution curve	Distribution data		Output data		Coefficient of utilization			Illuminance Data at 30" Above Floor for a Single Luminaire										
	From 0°	cp. Lumens	Zone Lumens	%lamp	pf pc	80%		20%		50% beam angle 53.7°		10% beam angle 85.6°						
					pw	50%	30%	50%	30%	50%	30%	Beam diameter	fc at beam edge	Beam diameter	fc at beam edge			
	0°	1568	0°-30°	1097	34.3	1	63	61	61	60	59	58						
	5°	1705	0°-40°	1602	50.1	2	58	55	57	55	55	53						
	15°	1467	0°-60°	1808	56.5	2	58	55	57	55	55	53						
	25°	1145	0°-90°	1817	56.8	3	54	51	53	50	51	49						
	35°	821	90°-180°	0	0.0	4	50	46	49	46	48	45						
	45°	244	0°-180°	1817	56.8*	5	46	43	46	42	45	42	8'	51.8	5.6'	25.9	10.2'	5.2
	55°	10				6	43	40	43	39	42	39	10'	27.9	7.6'	13.9	13.9'	2.8
	65°	4				7	40	37	40	36	39	36	12'	17.4	9.6'	8.7	17.6'	1.7
	75°	2				8	38	34	37	34	37	34	14'	11.9	11.7'	5.9	21.3'	1.2
	85°	2				9	35	32	35	32	34	31	16'	8.6	13.7	4.3	25.0'	0.9
	90°	0				10	33	30	33	30	32	29						

NOTES:

- For electrical characteristics consult Technical Bulletins tab.
- Tested to current IES and NEMA standards under stabilized laboratory conditions. Various operating factors can cause differences between laboratory data and actual field measurements. Dimensions and specifications are based on the most current available data and are subject to change without notice.

DCF-370-I

©2010 Acuity Brands Lighting, Inc. All Rights Reserved.

Rev. 6/11

gotham
An Acuity Brands Company

GOTHAM ARCHITECTURAL DOWNLIGHTING
1400 Lester Road Conyers Georgia 30012

P 800 315 4982 F 770 860 3129

www.gothamlighting.com