FEATURES

FUNCTIONAL

- Push button switches are preset to provide nine color change modes, nine static colors and 12 timing cycle modes.
- LED indicates load status.

ELECTRICAL

- Pilot current draw: 5ma at 24VDC.
- Operating voltages: 24VDC, low-voltage Class 2.
- Network wiring connections: CAT5, (RJ45) ethernet cable approved.

MECHANICAL

- Mounts to Lithonia SYRS 1GR or Steel City 52C13 one gang plaster ring attached to a ground 4" square, 2-1/2" deep outlet box or to a grounded Lithonia SQRS 1 GB or Steel City GW-125-G one gang masonary box (1-7/8" minimum inside width, 2-1/2" inside depth). Use of tile rings, shallow, narrow or ungrounded boxes can damage system.
- Faceplate held to frame by magnetic strips.

Type ..... Catalog number .....

System Accessories

LFVRS

Digital Remote Station

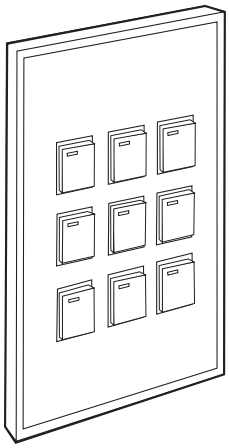

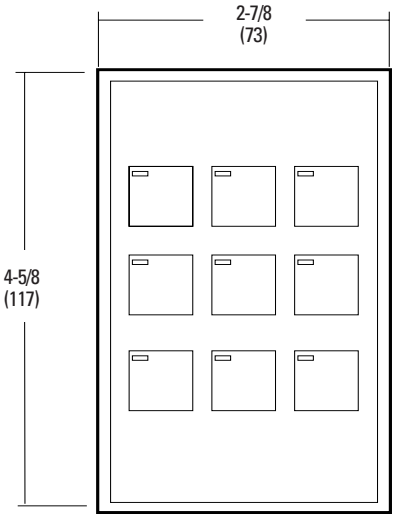

All dimensions are inches (millimeters).

ORDERING INFORMATION

Example: **LFVRS BJ4**

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog number (shipped separately).

LFVRS

Series	Finish	
LFVRS	**BJ4**	Brushed stainless, black frame and buttons
	BA4	Brushed aluminum, black frame and buttons
	BL4	Painted black, black frame and buttons
	WC2	Painted white, white frame and buttons
	IE3	Painted ivory, ivory frame and buttons

Accessories

Order as separate catalog numbers.

SYRS 1GR	Plaster ring, mounts to 4" box (by others)
LSA CAT5	Plenum rated network cable. Length must be specified (25ft or 50ft). Ex: LSA CAT5 25FT

gotham®
An Acuity Brands Company

GOTHAM ARCHITECTURAL DOWNLIGHTING
1400 Lester Road Conyers Georgia 30012
P 800 315 4982 F 770 860 3129
www.gothamlighting.com

©2006 , 2009 Acuity Brands Lighitng, Inc. All Rights Reserved.