



10" CHL Open Reflector Cylinder

Distribution curve Distribution data Output data Coefficient of utilization Illuminance Data at 30" Above Floor for a Single Luminaire


CHL10 100M 8RW FFL, MH100/C/U/MED lamp, 1.0 s/mh, 8500 rated lumens, Test No. LTL14369

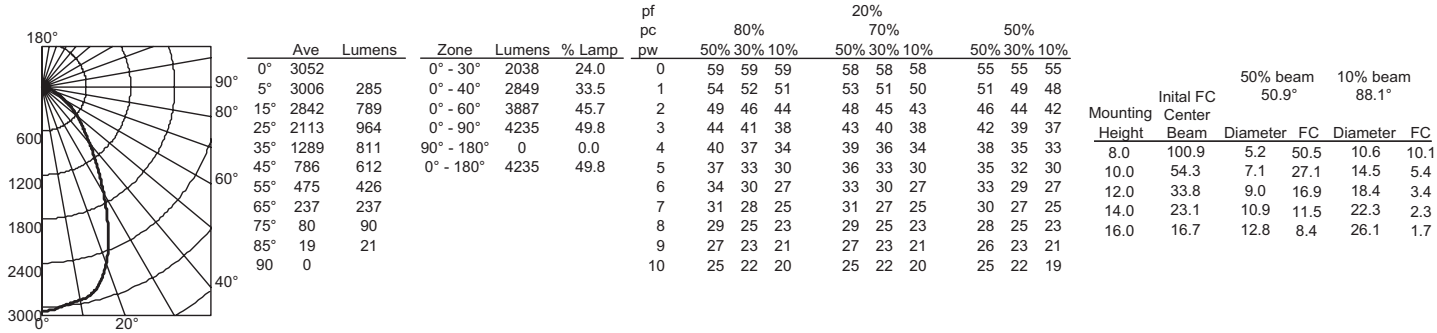


CHL10 100M 8RW T73, MH100/C/U/MED lamp, 1.0 s/mh, 8500 rated lumens, Test No. LTL14368

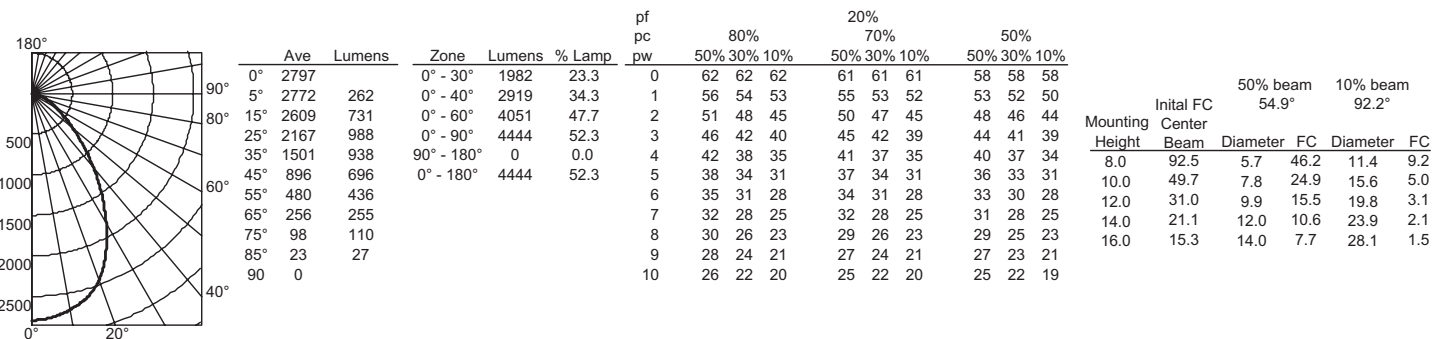

CHL10 100M 8RW FFL, MH100/C/U/MED lamp, 1.0 s/mh, 8500 rated lumens, Test No. LTL14193

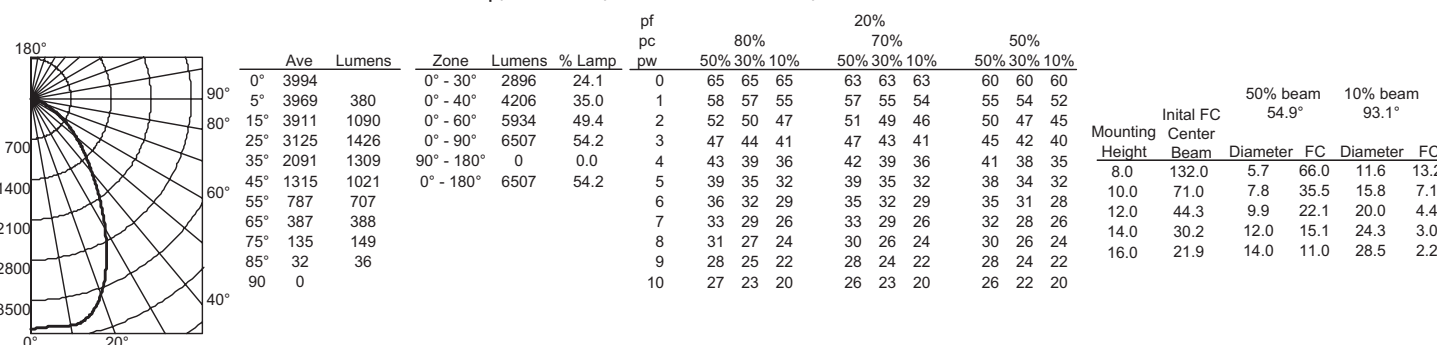

CHL10 150M 8RW T73, MH150/C/U/MED lamp, 1.1 s/mh, 12000 rated lumens, Test No. LTL14192

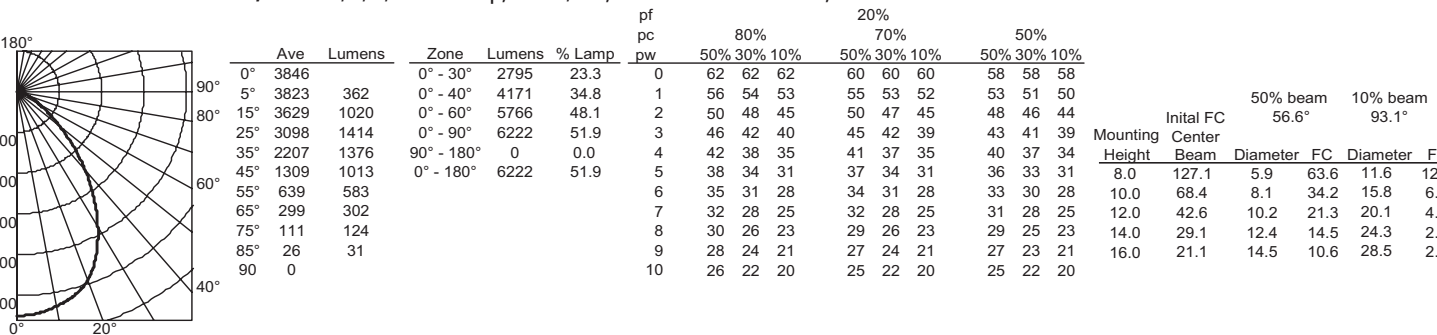

NOTES:
 1. For electrical characteristics, refer to Technical Bulletins tab.
 2. Tested to current IES and NEMA standards under stabilized laboratory conditions. Various operating factors can cause differences between laboratory data and actual field measurements. Dimensions and specifications are based on the most current available data and are subject to change without notice.

SHID-230

©2008, 2009 Acuity Brands Lighting, Inc. All Rights Reserved.
 Rev 2/10



An Acuity Brands Company