


**TRAC-MASTER®**

Avant Garde

**WISHBONE LOW VOLTAGE**
**T480 and T485**

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

**PRODUCT DESCRIPTION**

The sleek sculptured look and style of Wishbone fixtures is unparalleled in the industry. The elegance is carried through the entire design for a fresh, contemporary appeal.

**Construction** Molded polycarbonate yoke with die-formed steel ring.

**Aiming** Greater than 360° horizontal rotation eliminates aiming dead spots  
 • 90° vertical aiming capability • Vertical aiming locking screws secure lampholder position during relamping cycles.

**Transformer** Must be ordered separately • Compatible with T537 universal 12V electronic transformer for LED or halogen lamps ([T537](#) [T537QJ](#)).

**Labels** UL listed, CSA certified.

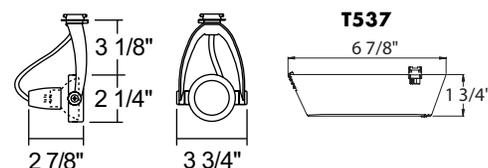
Specifications subject to change without notice.


**Low Voltage MR16**

**Lamp** 12V, 50W maximum MR16 GU5.3/GX5.3 bi-pin.

**Socket** Ceramic bi-pin.

Catalog Number	Finish	Lamp
T480 WH	White	50W MR16 max.
T480 BL	Black	50W MR16 max.
T480 SL	Silver	50W MR16 max.


**ACCESSORIES**

Cat. No.	Description	Cat. No.	Description
CGF 175	Color Glass Filter	DIFF 175	Diffusion Glass Lens
DCCF 175	Dichroic Color Correction Filter	UVF 175	UV Filter
DGF 175	Dichroic Glass Filter	LSPREAD 175	Linear Spread Glass Lens
SOLITE 175	Uniformity Lens (Solite)	EYEBROWBL	EyeBrow Accessory - Black
PRISM 175	Prismatic Spread Glass Lens	SNOOTBL	Snoot Accessory - Black
HCLBL 175	Hexagonal Cell Louver - Black	T74BL	1-3/4" Diameter Barn Doors - Black

See specification sheet [D1.2.2](#) for details. Other accessories can be found on specification sheet [D1.2.0](#).

**TRAC-MASTER®**

Avant Garde

**WISHBONE LOW VOLTAGE****T480 and T485****PRODUCT DESCRIPTION**

The sleek sculptured look and style of Wishbone fixtures is unparalleled in the industry. The elegance is carried through the entire design for a fresh, contemporary appeal.

**Construction** Molded polycarbonate yoke with die-formed steel ring.

**Aiming** Greater than 360° horizontal rotation eliminates aiming dead spots  
 • 90° vertical aiming capability • Vertical aiming locking screws secure lampholder position during relamping cycles.

**Transformer** Must be ordered separately • Compatible with T537 universal 12V electronic transformer for LED or halogen lamps ([T537](#) [T537QJ](#)).

**Labels** UL listed, CSA certified.

Specifications subject to change without notice.

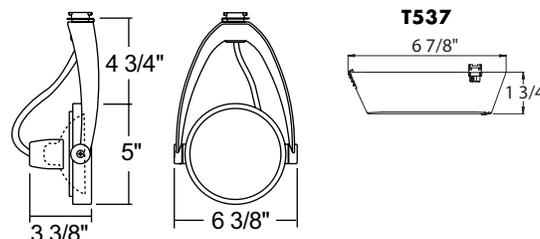
**Low Voltage AR111**

**Lamp** 12V, 60W maximum AR111 G53 with push-on contacts • Note: fixture designed for halogen AR111 lamps; since AR111 lamps are not ANSI dimensioned, lamp shape may vary - confirm lamp fit, especially LED lamps, prior to ordering fixture.

**Socket** Snap-on terminal cover with contacts.

**Lens** Glass lens included with each lampholder.

Catalog Number	Finish	Lamp
<b>T485 WH</b>	White	60W AR111 max.
<b>T485 BL</b>	Black	60W AR111 max.

**ACCESSORIES**

Cat. No.	Description	Cat. No.	Description
<b>HCLBL 469</b>	Hexcell Louver - Black	<b>DCCF 469</b>	Dichroic Color Correction Filter
<b>CCLBL 469</b>	Cube Cell Louver - Black	<b>UVF 469</b>	UV Filter
<b>EYEBROWBL</b>	Eyebrow Accessory - Black	<b>DIFF 469</b>	Diffusion Glass Lens
<b>SNOOTBL 469</b>	Snoot - Black	<b>SOLITE 469</b>	Uniformity Lens (Solite)
<b>CGF 469</b>	Color Glass Filter	<b>PRISM 469</b>	Prismatic Spread Glass Lens
<b>DGF 469</b>	Dichroic Glass Filter	<b>LSPREAD 469</b>	Linear Spread Glass Lens

See specification sheet [D1.2.2](#) for details. Other accessories can be found on specification sheet [D1.2.0](#).

Note: Filters and lenses require the use of three steel spring clips (supplied).