



TRAC 12/25

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

Miniature 25-Amp Low Voltage Trac System

TRAC SECTIONS, FEEDS, JOINERS AND PENDANT MOUNTINGS

TLVR



PRODUCT DESCRIPTION

Miniature, single-circuit trac sections for operation with 12 volt or 24 volt step down transformers as listed on pages [D3.1.2](#), [D3.1.3](#), [D3.1.5](#) (except TL546). Each trac section is supplied with dead end and is compatible with electrical feeds, joiner connectors and accessories as listed on this spec sheet, to permit NEC code-compliant installations. Accepts all Trac 12 cove, accent and pendant lampholders.

PRODUCT SPECIFICATIONS

Construction Extruded "I" beam channel aluminum for maximum strength • Injection molded polycarbonate dead-end with set screw • Standard lengths may be cut-to-length by installer.

Electrical Two 10 gauge solid copper conductors • Rated 25 amps at 12 or 24 volts.

Labels UL listed, CSA certified.

Government Procurement

BAA – Buy America(n) Act: Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations.

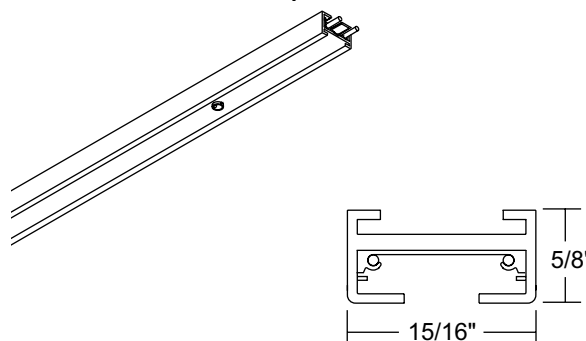
BABA – Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to www.acuitybrands.com/buy-american for additional information.

WARRANTY - 1-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

DIMENSIONS

Surface Mounted Trac 12/25



Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

PRODUCT INSTALLATION

Supplied with toggle bolts for surface mounting • Use with system components listed below to complete trac system.

ORDERING INFORMATION

Example: TLVR 8FT WH

Series	Length	Finish
TLVR Trac 12/25 Track Sections	2FT 2-foot track section; actual length 20-5/8"	BL Black WH White
	4FT 4-foot track section; actual length 44-5/8"	
	6FT 6-foot track section; actual length 68-5/8"	
	8FT 8-foot track section; actual length 92-5/8"	

Joiner Connectors (12V or 24V)

TLR20 BL, WH	TLR23 BL, WH	TLR24 BL, WH	TLR28 BL, WH
Accordion Adjustable Joiner Joins two trac sections at variable angles to left, right, up or down. Includes two terminal block connectors, joiner wires and covers. 	Miniature Straight Connector Joins two trac sections end-to-end. Includes terminal block joiner and cover. 	Adjustable Connector Joins two trac sections to form a 90-degree corner or straight coupling. Includes two terminal block connectors, joiner wires and covers. 	Dead End Use on extra field-cut trac sections.






TRAC 12/25

Miniature 25-Amp Low Voltage Trac System



TRAC SECTIONS, FEEDS, JOINERS AND PENDANT MOUNTINGS TLVR

Electrical Feeds (12V or 24V)


Examples: TLR21 BL, TLR36TB

TLR21	TLR34	TLR38	TLR36	TLR36TB
BL, WH	BL, WH	BL, WH	BL, WH	BL, WH
End Feed Connector and Outlet Box Cover Allows trac to be fed via remote transformer from an outlet box. Includes terminal block and mounting plate cover.	End Feed Connector and Conduit Feed Allows trac to be fed via remote transformer with conduit through the end or top using standard 1/2" electrical connectors. Includes terminal block feed connector, mounting plate and cover.	End Feed Connector Allows trac to be via remote transformer from top using standard electrical connectors. Includes terminal block connector, mounting plate and cover.	Outbox/T-Bar Ceiling Canopy Mounts over outlet boxes or on T-Bar ceiling to feed up to 4 tracs via a remote transformer. Includes one TLR36TB, mounting plate and cover. To feed more than one trac, order additional TLR36TB connectors. Requires TLR37 for T-bar installation.	Terminal Black Terminal block for TLR36 .
				

Accessories

TLR50	TLR37	TLR37916
BL, WH	BL, WH	BL, WH
Pendant Feed End Connector For use in conjunction with TLR90/91 Pendant Stem assembly to feed power into end of trac. Includes terminal block connector, support plate and cover.	15/16" T-Bar Attachment Clip To attach Trac 12/25 to inverted tee ceilings using flush or drop tiles. Use one for every 4' of Trac 12/25 trac.	9/16" T-Bar Attachment Clip To attach Trac 12/25 to inverted tee ceilings using flush or drop tiles. Use one for every 4' of Trac 12/25 trac.
		

Trac 12 Extension Wands

TLRW
12IN, 18IN, 24IN, 36IN, 48IN
BL, WH
Trac 12 Extension Wands Suspend Trac 12 lampholders from Trac 12 or Trac 12/25 trac sections or monopoints.





TRAC 12/25




Miniature 25-Amp Low Voltage Trac System

TRAC SECTIONS, FEEDS, JOINERS AND PENDANT MOUNTINGS

TLVR

Connectors/Mountings

TLR90	TLR91	TLR92
12IN, 18IN, 24IN, 36IN, 48IN	12IN, 18IN, 24IN, 36IN, 48IN	12IN, 18IN, 24IN, 36IN, 48IN
BL, WH	BL, WH	BL, WH
T-Bar Pendant Stem Kit For feed and/or support use. Includes full-size canopy, pendant stem, T-Bar plate with 15/16" T-bar clip and Trac mounting hardware. Feed requires TLR50 Pendant End Feed Connector. 	Junction Box Pendant Stem Kit For feed and/or support use. Includes full-size canopy, pendant stem, outlet box strap and Trac mounting hardware. Feed requires TLR50 Pendant End Feed Connector. 	Pendant Stem Mechanical Support Kit Suspends Trac 12/25 from T-bar ceilings or drywall. Includes Mini-Canopy, pendant stem, 15/16" T-bar clip, drywall anchor and Trac mounting hardware. 

TLR95	T94	T96
48IN, 144IN		
BL, WH	BL, WH	BL, WH
Stainless Steel Cable Mechanical Support Kit Suspends Trac 12/25 from T-bar ceilings or drywall. Includes Mini-Canopy, steel cable, 15/16" T-bar clip, drywall anchor and Trac mounting hardware. 	Sloped Ceiling Adapter Allows TLR90 or TLR91 pendant stem to hang straight down from sloped ceilings. Can be used to feed electrical wires to Track at up to 60° angle. 	Pendant Stem Threaded Coupling Enables multiple pendant stems to be joined for higher ceiling applications. 

For all Trac12/25 mounting accessories, use any combination of two for 2', 4' or 6' trac sections or three for 8' trac section. Stainless steel cable recommended only for trac patterns, not straight runs.