



FLEX 12

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

Flexible Low Voltage Trac System

PENDANT MOUNT FEEDS, SUPPORTS, PENDANTS & ACCESSORIES

TF21, TF22, TF90, TF91, TF92, T94, T96, TF950 & TFPS

PRODUCT SPECIFICATIONS

Catalog Number TF21 SL

Description Electrical Feed Cylinder • Heavy gauge beryllium copper contacts • Integral screw terminal connections accept up to 10 gauge solid wire • Wiper-action contact system simplifies installation • One Feed Cylinder required per 25 amp circuit • Use in conjunction with pendant/canopy accessories or Flexible Feed to install with Flex 12 Trac • Silver finish.

Electrical Rated 25 amps at 12V (300VA) or 24V (600VA).

Labels UL listed, CSA certified • New York City Approved.

Specifications subject to change without notice.

Catalog Number TF22 SL

Description Mechanical Support Cylinder • Provides mechanical support for Flex 12 Trac installation • Same physical dimensions as Feed Cylinder for coordinated appearance • One Support Cylinder is required per trac run and for every 4' of Flex 12 Trac • Use in conjunction with pendant/canopy accessories to install with Flex 12 Trac • Silver finish.

Labels UL listed, CSA certified • New York City Approved.

Specifications subject to change without notice.

Catalog Number TF90 SL

Description Canopy for T-Bar Ceilings • Combines with Pendant Stem and Feed Cylinder to provide power from the transformer secondary to the Flex 12 Trac • Mounts onto T-Bar runner • Can be electrically fed from the transformer secondary via flexible metal conduit or non-metallic cable entering into the top of the ceiling mounting plate • Silver finish.

Labels UL listed, CSA certified • New York City Approved.

Specifications subject to change without notice.

Catalog Number TF91 SL

Description Canopy for Rigid Ceilings • Combines with Pendant Stem and Feed Cylinder to provide power from the transformer secondary to the Flex 12 Trac • Mounts over standard 4" ceiling outlet box • Silver finish.

Labels UL listed, CSA certified • New York City Approved.

Specifications subject to change without notice.

Catalog Number TF92 SL

Description Mini-Canopy • Combines with Pendant Stem and Support Cylinder to provide mechanical support to the Flex 12 Trac • Supplied with toggle bolt for use in drywall ceilings • Installer may substitute wood screw or other fastener as required • Compatible with optional T-bar clip (order separately) for attachment to T-bar ceilings • Silver finish.

Labels UL listed, CSA certified • New York City Approved.






Specifications subject to change without notice.

R37D - 15/16" T-Bar Clip for drop tile ceilings.

R37F - 15/16" T-Bar Clip for flush tile ceilings.

R37916 - 9/16" T-Bar Clip for drop or flush tile ceilings.

DIMENSIONS



FLEX 12

Flexible Low Voltage Trac System

PENDANT MOUNT FEEDS, SUPPORTS, PENDANTS & ACCESSORIES

TF21, TF22, TF90, TF91, TF92, T94, T96, TF950 & TFPS

PRODUCT SPECIFICATIONS

Catalog Number TFPS


Description Pendant Stems • Use with Flex 12 Canopies or Surface Transformers to displace trac from ceiling at a fixed distance • Threaded top and bottom • Threads into Canopy, Feed Cylinder or Support Cylinder • Inside diameter accommodates two 10 gauge solid copper wires • Silver finish.

Labels UL listed, CSA certified • New York City Approved.

Specifications subject to change without notice.


PRODUCT CODES

Catalog Number	Description	Length	Finish
TFPS 3IN SL	Pendant Stem	3 ½"	Silver
TFPS 12IN SL	Pendant Stem	12"	Silver
TFPS 18IN SL	Pendant Stem	18"	Silver
TFPS 24IN SL	Pendant Stem	24"	Silver
TFPS 36IN SL	Pendant Stem	36"	Silver
TFPS 48IN SL	Pendant Stem	48"	Silver

**T96 SL**

Pendant Stem Threaded Coupling.
Enables multiple pendant stems to be joined for higher ceiling applications.

DIMENSIONS

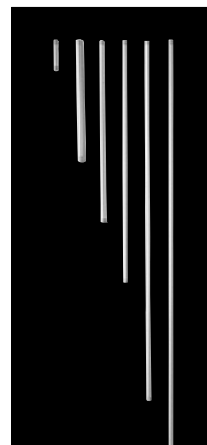**Catalog Number T94 SL**

Description Sloped Ceiling Adapter • Permits pendant stems to be hung vertically from sloped ceilings • Used in conjunction with TF91 or TF92 Ceiling Canopy (not included) • Allows feeding of wires to trac at up to a 60 degree angle • Accommodates a maximum of two 12 gauge solid THHN copper wires • Reduces feed capacity to 20 amps maximum • Silver finish.

Labels UL listed, CSA certified • New York City Approved.

Specifications subject to change without notice.

**Catalog Number TF950**

Description Flexible Feed Kit • Allows electrical feed location to be placed independently of mechanical supports • Mounts over standard 4" ceiling outlet box • Can be used in conjunction with Flex 12 Surface Transformer • Canopy provided with 60" (TF950 60IN SL) or 144" (TF950 144IN SL) of 10 gauge stranded tandem wire • Silver finish canopy • Requires TF21 Electrical Feed Cylinder (order separately).

Electrical Rated 25 amps at 12V (300VA) or 24V (600VA).

Labels UL listed, CSA certified • New York City Approved.

Specifications subject to change without notice.

