



Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

5" SHALLOW UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

IC25R

PRODUCT DESCRIPTION

IC Air-Loc® Remodel Housing • Energy efficient, sealed housing
 • IC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs
 • Can be completely covered with insulation • When used with Air-Loc Gasket, stops infiltration and exfiltration of air, reducing heating and cooling costs • Trims shown with Air-Loc symbol **Air-Loc** do not require a gasket.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected – see page 2.

Socket Medium base porcelain with nickel-plated copper screw shell
 • Floating socket with spring attaches to trim for installation.

Trims Trim selection shown on page 2.

Labels UL/cUL listed for through branch-wiring, damp locations and IP • Product thermally protected against improper use of lamps
 • Union made • UL and cUL Listed • Trim No. 212N is wet location approved for covered ceiling applications • Trim 275S is wet location approved for covered ceiling applications, **when used with outdoor rated PAR lamps.**



Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

INSTALLATION

Junction Box Pre-wired junction box, UL/cUL Listed for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) ½" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.

Housing IC housing, .032" aluminum sealed for Air-Loc Compliance
 • Remodel springs accommodate up to 1 ½" ceiling thickness.

DIMENSIONS

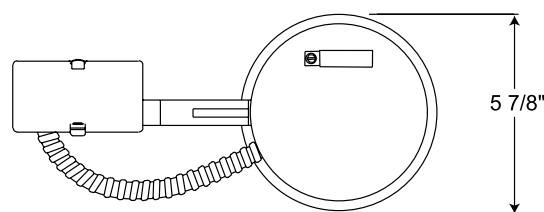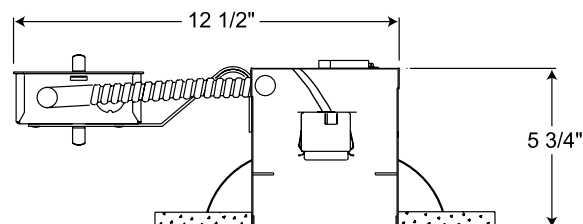

5 1/2" CEILING CUTOUT

Accessories

Catalog Number	Description
ALG5R	Air-Loc Gasket

To order, specify catalog number.

PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating
IC25R 5" Incandescent Remodel Shallow IC Housing	120V	R20/PAR20/BR30/PAR30/PAR30L (See page 2 for max. trim rating)

Housing and trim can be ordered together or separate, but will always ship separately.

Warranty 1-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions.

Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.











One Lithonia Way • Conyers, GA 30012 • Phone 1-800-705-SERV (7378) • TechSupport-Lighting@Acuitybrands.com • Visit us at www.acuitybrands.com
 Printed in U.S.A. © 2017-2025 Acuity Brands Lighting, Inc. Rev. 02/26/25

Light Commercial & Residential

5" SHALLOW UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS
IC25R


TRIMS/LAMPS

	Catalog Number	Description	Max. Lamp Rating
	 275S BWH ♦♦	Shallow Black Baffle, White Trim Ring	50W BR30, 50W PAR30, 50W PAR30L
	 275S WWH ♦♦	Shallow White Baffle, White Trim Ring	
	 688 BWH	Gimbal Ring, Black Baffle, White Trim Ring	35W PAR30, 35W PAR30L
	 688 WWH	Gimbal Ring, White Baffle, White Trim Ring	
	 212N WH ♦	Frosted Lens with Clear Center Trim, White	35W PAR30

Trim Size: 6¼" O.D.

Alzak is a registered trademark of Alcoa Corp.

Note: In Canada when insulation is present,
Type IC fixtures must be used.

 JUNO IC housings meet IECC Energy Code
requirements per ASTM E283.

Air-Loc® rated trims are pre-gasketed for minimum
air leakage with IC housings.

♦ UL Listed for use in wet location.

♦♦ UL Listed for use in wet location with outdoor rated lamp.

Housing and trim can be ordered together or separate,
but will always ship separately.