



# 4" IC REMODEL HOUSING IC1R LEDT24

COMPATIBLE WITH  
4RLD/E SERIES



Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

## PRODUCT DESCRIPTION

IC Air-Loc® Remodel Housing for use with Juno retrofit LED trim modules • Energy efficient, sealed housing • IC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs • Can be completely covered with insulation • Fully sealed housing stops exfiltration of air, reducing heating and air cooling costs without the use of additional gaskets.

## PRODUCT SPECIFICATIONS

**Electrical Connections** Features non-screw base 120V plug-in connector • Compatible with Juno retrofit LED trim modules

**Labels** U.L. listed for U.S. and Canada for through-branch wiring and damp locations. • Meets high efficacy requirements of California T24.

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.



## INSTALLATION

**Junction Box** Pre-wired junction box provided with removable access plate, (5) ½" knockouts and (4) Non-metallic sheathed cable connectors and ground wire • U.L. listed/CSA certified for through-branch wiring, maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Knockouts equipped with pryout slots.

**Housing** IC aluminum housing sealed for Air-Loc Compliance • Remodel springs accommodate up to a 5/8" ceiling thickness.



## DIMENSIONS

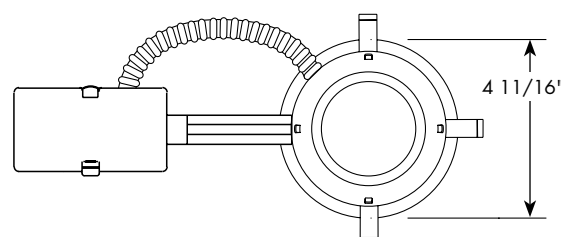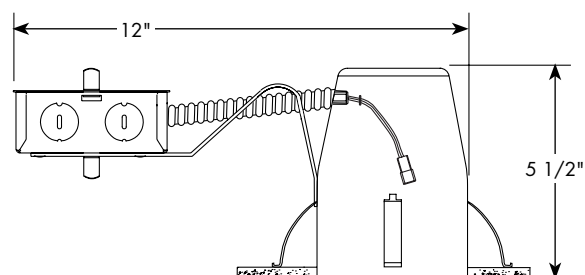

4 3/8" CEILING CUTOUT

## PRODUCT CODES

Catalog Number	Input Voltage
IC1R LEDT24	4" Remodel IC Housing, 4" Quick Connect Housing 120V

Housing and trim can be ordered together or separate, but will always ship separately.

## COMPATIBLE LED MODULES

Catalog Number	
4RLD G4 06LM 27K 90CRI 120 FRPC WWH M6	4" Juno Retrofit Downlight, Generation 4, 600 Nominal Lumens, 2700K, 90+ CRI, 120V, Forward/Reverse Phase Cut, White with White Trim Ring
4RLD G4 06LM 30K 90CRI 120 FRPC WWH M6	4" Juno Retrofit Downlight, Generation 4, 600 Nominal Lumens, 3000K, 90+ CRI, 120V, Forward/Reverse Phase Cut, White with White Trim Ring
4RLD G4 09LM 27K 90CRI 120 FRPC WWH M6	4" Juno Retrofit Downlight, Generation 4, 900 Nominal Lumens, 2700K, 90+ CRI, 120V, Forward/Reverse Phase Cut, White with White Trim Ring
4RLD G4 09LM 30K 90CRI 120 FRPC WWH M6	4" Juno Retrofit Downlight, Generation 4, 900 Nominal Lumens, 3000K, 90+ CRI, 120V, Forward/Reverse Phase Cut, White with White Trim Ring
4BEMW SSWW5 90CRI M6	4" Juno E Series Switchable White LED Baffle Retrofit Module, 700 Lumen, 5CCT, 90+CRI, 120V, White with White Trim Ring
4SEMW SSWW5 90CRI M6	4" Juno E Series Switchable White LED Smooth Retrofit Module, 700 Lumen, 5CCT, 90+CRI, 120V, White with White Trim Ring

Housing and trim can be ordered together or separate, but will always ship separately.