



Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

# IC LED OUTDOOR PERFORMANCE STEP LIGHT

## LED IC115LEDHSG, 838LED

### IP65



### PRODUCT DESCRIPTION

The Performance LED step light is rated for use in outdoor or indoor wall mount applications including concrete pour, brick masonry or drywall • May be used as LED retrofit kit for existing Juno PL115 outdoor rated step lights installed in application • Recessed housing is IC rated and can be completely covered with insulation • Back housing ships separately from power module trim for rough-in purposes • Designed to provide 50,000 hours of life • 5 year warranty on LED components.

### ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

- No harmful ultraviolet or infrared wavelengths
- No lead or mercury

### PRODUCT SPECIFICATIONS

**Housing** Die cast aluminum housing painted white for durability • Gasket for water tight seal in wet locations provides IP65 rating with 838LED trim • Cover plate provided to protect housing interior during rough-in • (2) 1/2" conduit compression fittings provided for wiring • (1) conduit fitting plug included • Two brackets supplied for nailing unit to studs.

**Power Module Trim** LED light engine and driver mounted directly to trim assembly for ease of wiring and installation into housing after rough-in.  
**LED Light Engine:** LED PCB utilizes 1 watt high lumen output LEDs binned to Energy Star standards • 3000K or 4000K color temperatures available.  
**LED Driver:** Non-dimming driver accommodates input voltage of 120 volts AC at 50/60Hz • Power factor > 0.9 at 120V input  
 • Driver is thermally protected and has integral overload and short circuit protection • Terminal connections provided as standard for easy removal.  
**Trim:** Available in textured white, black, bronze or silver corrosion resistant paint on cast aluminum • Fastens to housing with two allen head screws • Matte textured diffuser supplied with all trims.

**Life** Rated for 50,000 hours at 70% lumen maintenance.



**Labels** UL listed for wet locations, concrete pour approved • UL and cUL Listed, RoHS compliant • UL Listed as LED conversion retrofit kit for Juno PL115 outdoor rated step light • IP65 rated.

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.



### DIMENSIONS

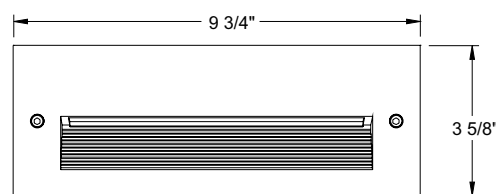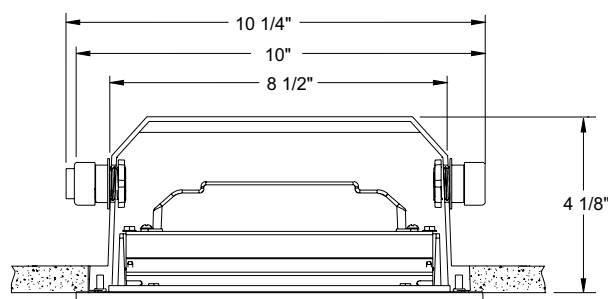

9" X 3" WALL OPENING



### ELECTRICAL DATA

Input Voltage	120V
Input Power	13.8W (+/-8%)
Input Current	0.12A
Frequency	50/60Hz
THD	<10%
Minimum starting temp	-20°C (-4°F)

**ORDERING INFORMATION:** Housing and power module trim each ordered separately. For use as a retrofit, order power module trim only.

Example: **IC115LEDHSG**


Example: **838LED 13W 40K 120 BL**

Back Housing	Power Module Trim	Wattage	Color Temperature	Voltage	Trim Finish
IC115LEDHSG 	838LED 	13W 13 Watts	30K 3000K 40K 4000K	120 120V	BL Black Textured BRZ Bronze Textured SR Silver Textured WH White Textured


# IC LED OUTDOOR PERFORMANCE STEP LIGHT

## LED IC115LEDHSG, 838LED


**Catalog Number:** IC115LEDHSG  
838LED 13W 40K 120 BL  
**Test Number:** PT09102902  
**Total Lumens:** 182 lms  
**Mounting Height:** 1.50 ft

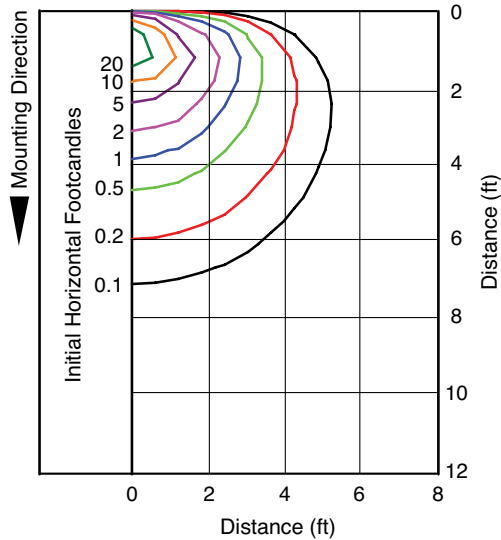


**Catalog Number:** IC115LEDHSG  
838LED 13W 40K 120 WH  
**Test Number:** PT09102901  
**Total Lumens:** 293 lms  
**Mounting Height:** 1.50 ft

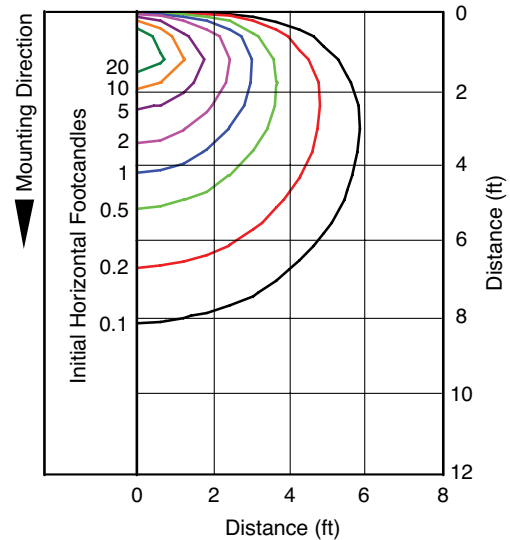

**Catalog Number:** IC115LEDHSG  
838LED 13W 40K 120 BL  
**Test Number:** PT09102902  
**Total Lumens:** 182 lms  
**Mounting Height:** 2.00 ft

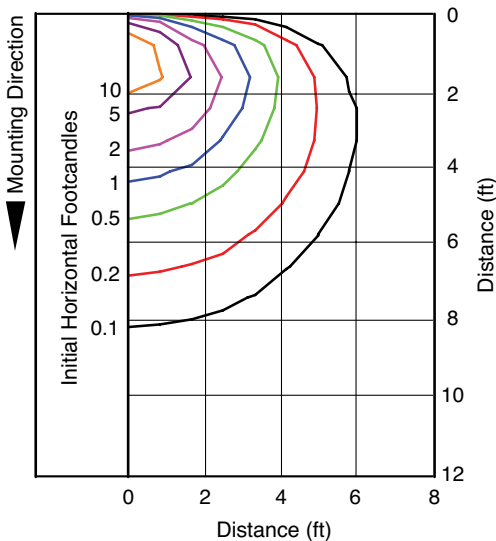

**Catalog Number:** IC115LEDHSG  
838LED 13W 40K 120 WH  
**Test Number:** PT09102901  
**Total Lumens:** 293 lms  
**Mounting Height:** 2.00 ft

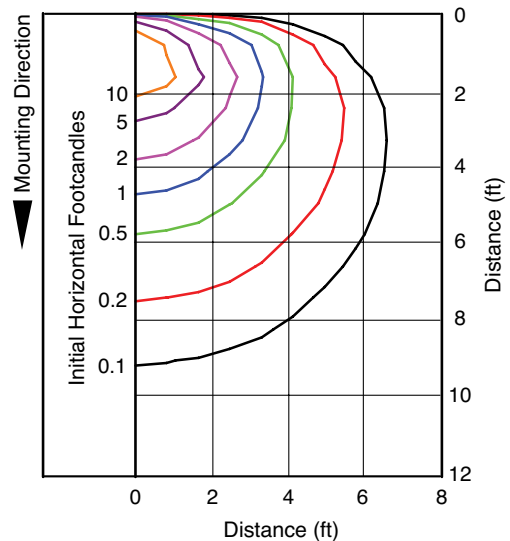

Multiplier: 3K - 0.95