

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in residential applications. Ideal for use in workshops and utility rooms.

CONSTRUCTION

The shoplight's 5-1/2" white reflector provides a wide spread illumination. Fully assembled, ready-to-install. Comes with 5' power cord - no wiring required. Supplied with (2) "S" hooks and (2) 9-1/2" chains for no-hassle installation.

Minimum Starting Temperature: 0°F (-18°C)

Fluorescent lamps for energy efficiency. (not included)

ELECTRICAL

Standard with low-power factor magnetic ballast (120 volt, 60Hz).

LISTINGS

CUL listed to US and Canadian safety standards and suitable for damp locations.

WARRANTY

2-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

NOTE: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

Catalog Number
Notes
Type

Indoor General Purpose


Shoplight Utility

Linear T8 & T12 Fluorescent



Dimensions

All dimensions are inches (centimeters)

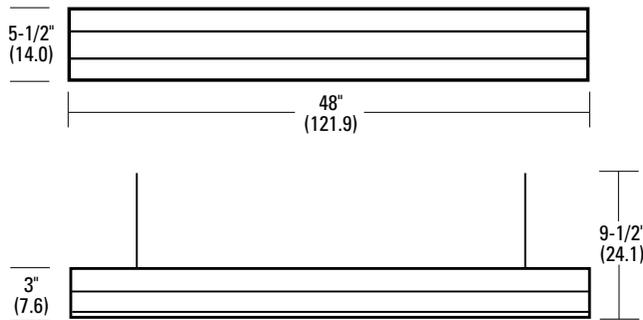

ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

Example: 1233

1233	
Series ^{1,2,3,4}	Ballast/voltage
1233 (2) 40W, 34W or 25W linear T12 fluorescent lamps required (2) T8 32W fluorescent lamps for RE and CW 232	(blank) 120V magnetic ballast (standard) 1233 RE Residential Electronic Ballast 1233 CW 232 Residential Electronic Cold Weather Ballast Other voltage and ballast types (consult factory)

Notes

- Lamps not included.
- Use with non-dimmable switches only.
- Not designed to be mounted flush to the ceiling.
- Must be plugged into three pronged outlets to avoid electrical shock and to ensure reliable starting.