

## FEATURES & SPECIFICATIONS

**INTENDED USE** — The OneUp™ recessed direct-wire LED downlight includes integrated junction box, trim, pre-installed non-metallic bushings and 3-port push wire quick connectors in one package. The OneUp is the most economical means to create a well lit environment with exceptional energy efficiency and near zero maintenance.

**CONSTRUCTION** — Aluminum die cast, square baffle trim. Integrated galvanized steel junction box with captive door for easy access. Suitable for daisy chaining (pulling wires). Available in 3000K and 4000K color temperature LEDs.

**OPTICS** — Square baffle recesses optical system into the ceiling to prevent glare and provide a traditional look. Diffused lens provides even light distribution for general illumination, equivalent to 65W incandescent flood lamp. Wide flood beam angle at >90°. CRI >90. Maintains at least 70% light output for 50,000 hours.

**INSTALLATION** — Tool-less installation. Secure trim retention with two side-mounted spring clips for easy installation in plaster, sheet rock, or plywood ceilings. The integrated junction box - with pre-installed non-metallic bushing - allows non-metallic cable to be fed through without the hassle of knockouts. The captive junction box door provides easy access to pre-installed 3-port push wire quick connectors for straight-forward wiring. Rated for Type IC installations. Maximum of 4 No. 12AWG through branch circuit conductor suitable for 90°C permitted in box. Ground wire provided.

**ELECTRICAL SYSTEM** — LED module with high-efficiency on board driver. Dimming down to 10%. For compatible dimmers, refer to: Compatible dimmers chart.

Actual wattage may differ by +/-5% when operating at 120V +/-10%.

**LISTINGS** — ETL certified to US and Canadian safety standards. Can be used to comply with California Title 24 Part6 High Efficacy LED Light Source Requirements. WSEC ASTM E283 for Air-Tight rated with gasket or caulking between fixture trim and ceiling. Wet location listed\*. Indoor damp location only for items in Brushed Nickel finish.

**WARRANTY** — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application.


All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

### Specifications

Aperture:	2-13/16" (72.0)
Overlap Trim:	5" (125.0)
Height:	4-3/8" (109.7)
Ceiling Opening:	4-5/8" (117)
Min Ceiling Thickness:	1/2" (12.7)
Max Ceiling Thickness:	1-1/2" (38.1)

All dimensions are inches (millimeters).

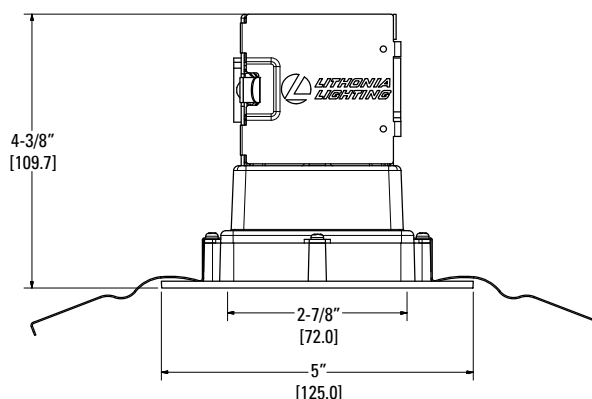

## Direct-Wire LED Recessed Downlight

# 4JBK SQ

IC  
Remodel

## ORDERING INFORMATION

Catalog Number	Description
*261RJY 4JBK SQ 30K 90CRI MW M6	Canless Kit 4" Baffle, Round, 3000K CCT, 9W, 625L, 90CRI, Matte white
*250KU7 4JBK SQ 40K 90CRI ORB M6	Canless Kit 4" Baffle, Round, 4000K CCT, 9W, 640L, 90CRI, Oil Rubbed Bronze

**Accessories:** Order as separate catalog number.

OUJBK643 PAN U Universal Construction Pan




Universal Construction Pan

### Notes

- 1 Total System Delivered Lumens.
- 2 Indoor damp location only for items in Brushed Nickel Finish.

4JBK SQ OneUP™ Direct Wire LED

PHOTOMETRICS

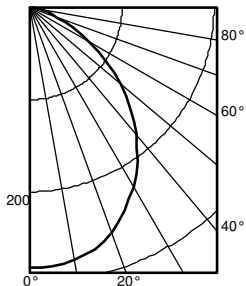Distribution Curve	Distribution Data		Output Data		Coefficient of Utilization			Illuminance Data at 30" Above Floor for a Single Luminaire									
					pf												
		Ave Lumens	Zone Lumens % Lamp		pc	80%			70%			50%			50% beam - 61.3° 10% beam - 103.5°		
					pw	50%	30%	10%	50%	30%	10%	50%	30%	10%			
	0°	283	0° - 30° 215.1 34.1	0		119	119	119	116	116	116	111	111	111			
	5°	282	0° - 40° 341.9 54.2	1		106	102	99	104	101	97	100	97	94			
	15°	271	0° - 60° 552.2 87.5	2		94	88	83	92	87	82	89	84	80			
	25°	243	0° - 90° 631.0 100.0	3		84	77	71	82	76	70	79	74	69			
	35°	204	90° - 120° 0.0 0.0	4		75	67	61	74	66	61	71	65	60			
	45°	155	90° - 130° 0.0 0.0	5		68	59	53	67	59	53	65	58	52			
	55°	102	90° - 150° 0.0 0.0	6		61	53	47	60	53	47	59	52	46			
	65°	52	90° - 180° 0.0 0.0	7		56	48	42	55	47	42	54	47	42			
	75°	19	0° - 180° 631.1 *100.0	8		51	43	38	51	43	38	49	42	37			
85°	5	*Efficiency	9		47	39	34	47	39	34	46	39	34				
90°	0		10		44	36	31	43	36	31	42	36	31				
Mounting Height Initial FC Center Beam Diameter FC Diameter FC																	
8.0 9.4 6.5 4.7 14.0 0.9																	
10.0 5.0 8.9 2.5 19.0 0.5																	
12.0 3.1 11.3 1.6 24.1 0.3																	
14.0 2.1 13.6 1.1 29.2 0.2																	
16.0 1.6 16.0 0.8 34.2 0.2																	

ENERGY DATA

4" SQUARE ENERGY DATA		
Color Temperature	3000K	4000K
Lumens	625	640
CRI	90	
Lumens/Watt	69.44	71.11
Min. starting temperature	-18°C (-0°F)	
EMI/RFI	FCC Title 47 CFR, Part 15, Class B	
Sound rating	Class A Standards	
Input voltage	120V AC	
Min. power factor	0.9	
Input frequency	50/60HZ	
Rated wattage	9W	
Input power	9W	
Input current	0.07A	

DIMMER COMPATIBILITY

COMPATIBLE DIMMERS				
Lutron	Leviton	Pass & Seymour	Synergy/Leviton	Sensorswitch
DV-603P-LA	6633-PA	HCL453PTCCCV6	ISD 600 I 120 / IPI06	nSP5 PCD 2W
CT-603PR-WH	6615-P	LS 603 PWV	ISD 1000 I 120 / IPI10	nSP5 PCD ELV 120
DVELV-300P			ISD 400 ELV 120 / IPE04	
300P SELV				
DV-600P				
NTELV-300P				
NLV-600				
Caseta PD-6WCL dimmer (requires Lutron Smart Bridge L-BDG2-WH which is sold separately from the dimmer)				

LIGHTING FACTS

LED

lighting facts®

A Program of the U.S. DOE

Light Output (Lumens)

Watts

Lumens per Watt (Efficacy)

625

9

69.44

Color Accuracy

Color Rendering Index (CRI)

90

Light Color

Correlated Color Temperature (CCT)

3000 (Bright White)

Warm White

Bright White

Daylight

2700K

3000K

4500K

6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: NJSM-GFQ33F (7/20/2017)

Model Number: 4JBK SQ 30K 90CRI

Type: Luminaire - Downlight