

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in workshops, utility rooms, and garages.

### CONSTRUCTION

Constructed of a metal housing with decorative plastic end caps and a pull chain for easy on/off operation. The white acrylic lens provides even illumination on surfaces where tasks are performed. Both shoplights are designed for suspended installation only.

Includes 5A Max convenience outlet for linkability of up to 10 fixtures.

### ELECTRICAL

LEDs have a 50,000 hour L70 rated life. Provides a cool color temperature of 4000K with a CRI of 80. Starts reliably down to 0° F (-18° C).

Standard with 120V driver (120V, 60Hz).

Produces 4000 lumens, Standard input=40 watts, 100 lumens per watt. Actual wattage may differ by +/- 5 per cent when operating at 120V .

### INSTALLATION

Mounting chains and S-hooks included.

### LISTINGS


CSA listed to US and Canadian safety standards.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**NOTE:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Covered by the following patent: U.S. Patent No. 7,011,428

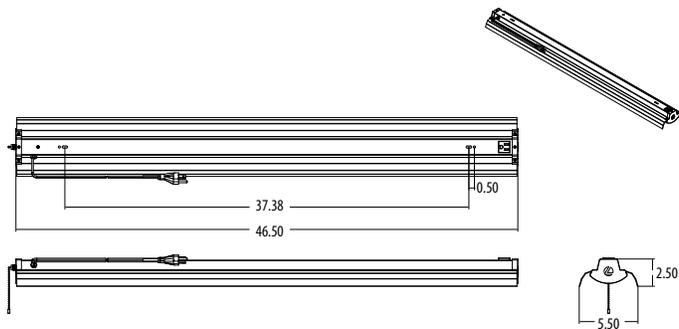

Catalog Number
Notes
Type

Indoor General Purpose

# LED Linkable Diamond Plate Shoplight

HIGH-PERFORMANCE LED



### Specifications

Length: 46.5 (118.1)

Width: 5.5 (13.97)

Height: 2.5 (6.35)

Weight: 4.5 lbs.

All dimensions are inches (centimeters) unless otherwise indicated.

### ORDERING INFORMATION


For shortest lead times, configure product using **bolded options**.

Series	Finish
<b>DPSL 48IN 40K 80CRI</b>	<b>CHR</b> Chrome

# LED Shoplight

## PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory. Actual performance may differ as a result of end-user environment and application.

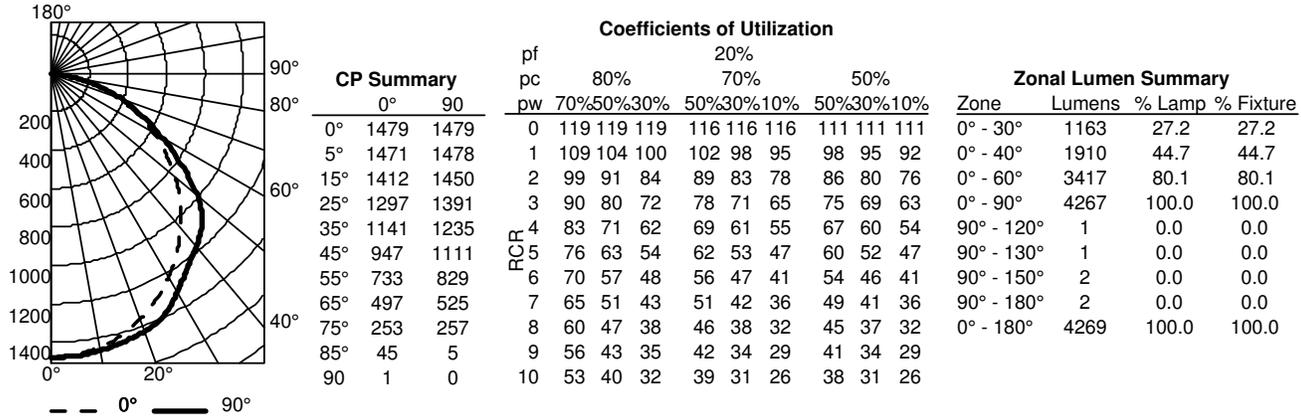

## LIGHTING FACTS

Lithonia Lighting

**LED lighting facts**  
A Program of the U.S. DOE

---

**Light Output (Lumens)** 4000

**Watts** 40

**Lumens per Watt (Efficacy)** 100

---

**Color Accuracy** 83  
Color Rendering Index (CRI)

---

**Light Color** 4000 (Bright White)  
Correlated Color Temperature (CCT)

Warm White    Bright White    Daylight  
2700K    3000K    4500K    6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: NJSM-KDOEY1 (10/26/2016)  
Model Number: DPSL 48IN 40K 80CRI  
Type: Luminaire - Desk/Task