



## FEATURES & SPECIFICATIONS

### INTENDED USE

For applications requiring low-profile, attractive emergency lighting.

To be powered by 6V battery equipment as part of an emergency lighting system, providing light for the path of egress. Ideal for damp and wet location areas requiring remote lighting.

### CONSTRUCTION

Compact, low-profile, architectural design with die-cast aluminum housing. Available finishes are texturized polyester powder coat paint in brushed nickel, white, black and dark bronze. All finishes can be painted in the field to match the wall color of choice.

### U.S. Patent No. D468,046.

**OPTICS:** Two 6-watt, 6-volt, wedge-base xenon lamps offer 55 percent more light output than standard incandescent lamps. Meets requirements for NEC 700.16.

**Forward throw (FWD option):** Provided with two high-brightness white LEDs (10.8W total), projecting an NFPA-101 compliant path 3' wide and 28' forward, when mounted 8-1/2' AFF. The typical life of the LED lamp is 10 years.

Patent-pending reflector/refractor design features superior vac-metalized, die-casted reflectors; and multi-faceted, highly transmissive refractor that significantly improve photometrics.

**INSTALLATION:** Universal J-box mounting pattern.

Rigid conduit entry provision on top of the unit.

### LISTING

UL Listed for wet locations in accordance with UL 924. Cold weather listed -40°F to 122°F (-40°C to 50°C).

### WARRANTY

5-year limited warranty (FWD option only). Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25°C.

Specifications subject to change without notice.


Catalog Number
Notes
Type



**AFFINITY<sup>®</sup>**  
Unit Accessories

**ELA AFNR**

Remote Fixture

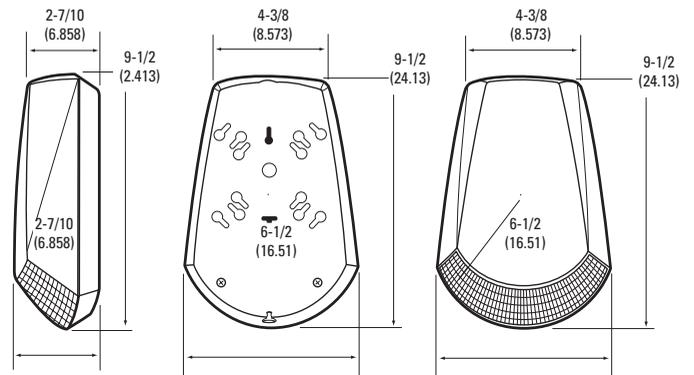

All dimensions are inches (centimeters).

Shipping weight: 2.3 lbs. (1.59 kgs.)

### ORDERING INFORMATION

For shortest led times, configure product using **standard options (shown in bold)**.

**Example:** ELA AFNR DB

ELA	AFNR		
Series	Fixture	Finish	Options
ELA <sup>1</sup>	<b>AFNR</b> Remote Affinity fixture	W White B Black BN Brushed nickel <b>DB</b> Dark Bronze	<b>FWD</b> Forward throw optics with LED light source, 10.8W

NOTE:

1 Refer to [AFN](#) specification sheet for photometric and dimensional data.



ELA-AFNR