

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in commercial and residential applications. Ideal for use in closets, foyers, hallways, corridors, living rooms, bedrooms, offices, stairways and more.

CONSTRUCTION

Fan-shaped details on the low-profile, matte white acrylic diffuser create more subtle details than a light fixture with contrasting finishes on housings or trims. Available in a round or square shape.

OPTICS

Produces 1,200 lumens at 50,000 hours of life.

ELECTRICAL

Fixture operates at 120 volts, 60Hz. Standard input = 24 watts, 52 lumens per watt.

Works with most standard incandescent dimmers (see list of approved dimmers).

INSTALLATION

All mounting hardware included for mounting to a standard junction box. Can be wall or ceiling mounted.

LISTINGS

cUL Listed to US and Canadian safety standards. ENERGY STAR® certified.

WARRANTY

5-year limited warranty. Complete warranty terms located at

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25°C.

Specifications subject to change without notice.

Decorative Indoor

Crenelle LED Flush Mount



Round Specifications

Depth: 3-1/2 (8.9)

Diameter: 14 (35.6)

Weight: 1.5 lbs

Square Specifications


Depth: 3-3/8 (8.6)

Width: 15-1/2 (39.4)

Length: 14-7/8 (37.8)

Weight: 1.5 lbs

All dimensions are in inches (centimeters) unless otherwise indicated.

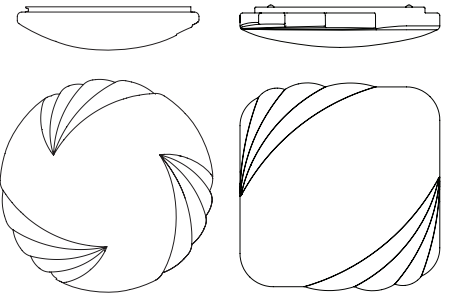

ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: FMCRNL 14 20830

Series		Module/CRI	Color temperature
FMCRNL 14	14" Round LED flush mount	208 >80	40 4000K
FMSCNL 14	14" Square LED flush mount		35 3500K ¹
			30 3000K
			27 2700K ¹


Accessories: Order as separate catalog number.	
DFMCRNL 14	14" round acrylic diffuser
DFMSCNL 14	14" square acrylic diffuser

Notes

¹ Minimum 90-day lead time for non-standard color temperatures; minimum 50 order quantity.

LED Flush Mount Crenelle

LIGHTING FACTS

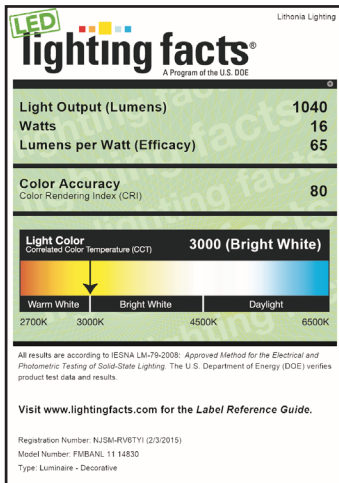

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.

SUGGESTED DIMMERS

The FMCRL is designed to operate with most standard Triac Based dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.

Manufacturer	Part number(s)
Leviton	6633P
	IPL06
	6674P
	IPE04
	Trimatron 600W
Lutron	DVELV 300P
	Skylark 300P
	NTELV 300
	NLV 600
Synergy	ISD 600 I 120