

## FEATURES & SPECIFICATIONS

**INTENDED USE** — Recessed housing rated IC. For remodel construction only.

Approved for factory assembled wiring only.

Approved for direct burial in insulation.

**CONSTRUCTION** — Air-tight standard. Tested to meet current energy codes.

Aluminum housing with three remodel clips for installation in existing plaster, sheet rock or mechanical ceiling.

Heavy-gauge galvanized steel raceway arm.

Galvanized steel junction box with four built-in Romex clamps. Five 1/2" knockouts with slots for pryout. Not suitable for pulling wires.

Rated for 90° C.

Ground wire provided.

Removable J-box doors for easy access.

Trim retention (clips): Retaining clips riveted to top of reflector hold trim inside housing.

Trim retention (TOR): Two-side mounted torsion springs on the trim and 2 receiving brackets in the can ensure a consistently tight fit with the ceiling.

**ELECTRICAL** — Durable medium base porcelain socket with nickel plated copper alloy screw shell and contact.

Socket clips to top of housing to prevent paint overspray in socket screw shell.

Socket attaches to reflector to ensure proper and consistent lamp position.

Thermal protection provided against improper lamp usage.

120 volt only.

**INSTALLATION** — Air-tight housing suitable for air-tight installations. Refer to energy codes for proper installations.

2 x 8 existing ceiling or T-bar ceiling panel installation.

Clip adjustment on housing (up to 1/2") allows for flush mounting with ceiling face.

**LISTINGS** — UL Listed to US and Canadian safety standards. Damp location listing (See trim selection for wet location listing).

**WARRANTY** — 1-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

Note: Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.

Catalog Number
Notes
Type

**5" Housing**

# L5R

**INCANDESCENT**

IC

Remodel Construction



### Specifications

Height: 7-1/2 (19.1)


Length: 11-1/2 (29.2)

Width: 5-3/4 (14.6)

Ceiling opening: 5-5/8 (14.3)

Ceiling cutout template: 5.39

All dimensions are inches (centimeters) unless otherwise specified.

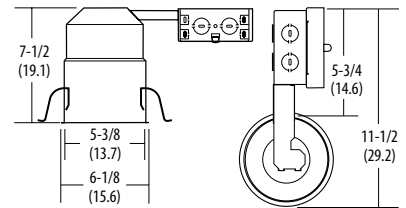

### ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

**Example: L5R R6**

<b>L5R</b>	
<b>Series</b>	<b>Packaging</b>
<b>L5R</b>	<b>R6</b> Resale pack of six
	<b>U</b> Unit

### Notes

See trim summary on reverse side for maximum wattages.

# L5R 5" Remodel Housing

Description	Maximum wattage <sup>1</sup>
Catalog number	

## General/Task

Open Narrow Flange

**502MW TOR** Matte white



50 R20  
65 BR30  
75 PAR30<sup>2</sup>

IC/Non IC

Baffle Deep Narrow Flange

**5B2 TOR** Black, white flange

**5B2MW TOR** Matte white



50 R20 (white only)  
65 BR30 (white only)  
75 PAR30 (white only)  
50 PAR30  
60 PAR38

IC/Non IC

### Notes

- 1 Maximum wattage listed. Lower wattage lamps may be used.
- 2 Short neck.