

## FEATURES & SPECIFICATIONS

**INTENDED USE** — Provides general illumination in residential applications. **If required for commercial application or operation more than eight (8) hours per day, consult factory for available options.** Ideal for use in foyers, hallways, bedrooms, offices, utility work areas, stairways and many other rooms in the house.

**CONSTRUCTION** — The beauty of simplicity in low profile styled, round, stay-white, acrylic diffuser, available in four sizes: 11", 14", 19" or 24". These fixtures provide an attractive low-cost lighting solution for every room in the home. Hidden cam-latches provide easy diffuser removal for installation and maintenance.

**ELECTRICAL** — Fixtures available with lamps and without lamps. Fixtures without lamps are available in either compact double twin-tube (DTT) 4-pin or circline T9 fluorescent lamp(s) configurations. Fixtures with lamps include circline T9 4100 K fluorescent lamp(s) for energy efficiency and superior color rendering. Standard with electronic ballast (120 volt, 60Hz) ensures no flickering and quiet operation without interfering with other home electronics. For use with non-dimmable switches only.

**INSTALLATION** — All mounting hardware included.

**LISTINGS** — UL Listed to US and Canadian safety standards and suitable for damp locations.

**WARRANTY**

2-year limited warranty. Complete warranty terms located at:

[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

NOTE: Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.

Catalog Number
Notes
Type

Decorative Indoor

# Low Profile Round Flush Mount




Circline T9 or Compact DTT Fluorescent



DIMENSIONS					
Nominal size	Lamp configuration	Model number	Number of lamps	(A) Width inches (cm)	(B) Extension* inches (cm)
11" dia		FM22 ACLR LP	(1) 22W circline T9	11 (27.9)	3-1/4 (8.3)
		FMLR22			
		FMLR11 2 13 DTT	(2) 13W compact DTT		
14" dia		FMS4 ACLR LP	(1) 22W & (1) 32W circline T9	13-3/4 (34.8)	3-1/2 (8.9)
		FMLR54			
		FMLR14 2 18 DTT	(2) 18W compact DTT		
19" dia		FMLR72	(1) 32W & (1) 40W circline T9	19-1/4 (47.0)	3-5/8 (9.2)
			FMLR19 3 26 DTT		
24" dia		FMXLR 72	(1) 32W & (1) 40W circline T9	24 (61.0)	4-3/4 (12.0)

\*Extension from ceiling.  
All dimensions are inches (centimeters) unless otherwise indicated.

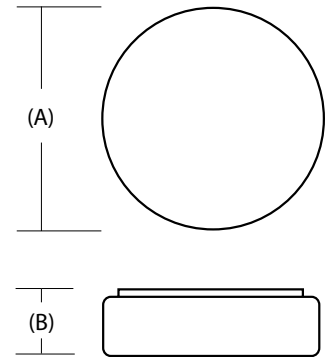

**ORDERING INFORMATION** Lead times will vary depending on options selected. Consult with your sales representative.

**Example: FM22 ACLR LP**

Series <sup>1</sup>	
<b>11" diameter</b>	<b>19" diameter</b>
FM22 ACLR LP (1) 22W circline T9 lamp included <sup>2</sup>	FMLR 72 (1) 32W & (1) 40W circline T9 lamp required <sup>3</sup>
FMLR 22 (1) 22W circline T9 lamp required <sup>3</sup>	FMLR19 3 26 DTT (3) 26W compact (DTT) lamp(s) required <sup>3</sup>
FMLR11 2 13 DTT (2) 13W compact (DTT) lamp(s) required <sup>3</sup>	<b>24" diameter</b>
<b>14" diameter</b>	FMLXR (1) 32W & (1) 40W circline T9 lamps included <sup>2</sup>
FMS4 ACLR LP (1) 22W & (1) 32W circline T9 lamp(s) included <sup>2</sup>	
FMLR 54 (1) 22W & (1) 32W circline T9 lamp required <sup>3</sup>	
FMLR14 2 18 DTT (2) 18W compact (DTT) lamp(s) required <sup>3</sup>	

**Notes**

- 1 Use with non-dimmable switches only.
- 2 Includes circline T9 4100 K fluorescent lamp(s).
- 3 Lamp(s) not included.

# Low Profile Round Flush Mount

---

## PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.