

## FEATURES & SPECIFICATIONS

**INTENDED USE** — The 6" Wafer-Thin LED recessed downlight with remote driver box combines high quality light output and efficiency while eliminating the need for a recessed housing. The innovative, slim design allows for easy retrofit, remodel or new construction installation from below the ceiling. The Wafer downlight provides general illumination in residential and commercial applications including multi-family and hospitality. Ideal for use in living and dining areas, bedrooms, closets, hallways, bathrooms, showers, kitchens, basements, soffits, entryways and porches. The Wafer LED downlight is wet location listed – making it ideal for use in a breadth of outdoor residential, hospitality, commercial and multifamily applications.

**CONSTRUCTION** — Die cast aluminum mounting frame with integral polycarbonate flange provides passive thermal cooling achieving L70 at 50,000 hours. Non-conductive dead-front trim design suitable for a wide range of applications and codes requiring a non-conductive lens assembly. IC rated driver and fixture – approved for direct contact with insulation. FT4 plenum rated cable connector to connect from module to remote driver box. Isolated driver integrated inside steel remote box with four 7/8" knockouts with slots for pryout. Suitable for pulling wires with the 12 cubic-inch wiring compartment to accommodate up to (6) 14 gauge insulated conductor, or (4) 12 gauge insulated conductors; making the Wafer LED Downlights much easier to wire in 2in/2out (plus ground) daisy-chain applications and contractor friendly. Wire nuts included.

**INSTALLATION** — Ideal for shallow ceiling plenum; no housing required. Steel spring clip for easy installation. 6" cut out template provided to ensure correct sized hole is cut into ceiling for proper installation of the trim. Size of hole should not exceed 6 1/4 inches for this product. Suitable for installation in t-grid and drop ceiling applications with the WF8643 Pan. 2" plenum space required for installation of the remote driver box.

**OPTICS** — Edge-lit LED technology uses light guided plate to distribute light. Polycarbonate lens provides even illumination throughout the space. Utilized 3000K and 4000K color temperature LEDs binned within 3-step MacAdam ellipse, 90 CRI.

**ELECTRICAL** — Connect directly to 120V power supply via provided UL recognized driver. High efficient driver with power factor > 0.9. Ambient operating temperature: -40°F (-40°C) to +104°F (+40°C). Dimming down to 10% (See page 2 for recommended dimmers).

**LISTINGS** — CSA certified to US and Canadian safety standards. Wet location. Air Tight certified in accordance with ASTM E283-2004. NOM Certified. Can be use for State of California Title 24 high efficacy LED compliance under JA8, reference Modernized Appliance Efficiency Database System (MAEDBS) for 2019 JA8 High Efficacy Lighting.

**WARRANTY** — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at:

[www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Catalog Number
Notes
Type

Wafer Static LED Recessed Downlight

# WF6E


## 6" LED Module

IC/Non-IC  
New Construction/Remodel



### Specifications

Aperture:	4.9 (12.4)
Ceiling opening:	6 (15.2)
Overlap trim:	6.7 (17)
Height:	1.1 (2.8)
Weight	1lbs

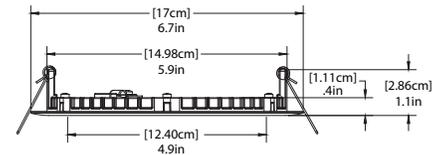

Only compatible with single layer sheet rock.

All dimensions are inches (centimeters) unless otherwise indicated.

### ORDERING INFORMATION

Example: WF6E LED 30K 90CRI MW

Series	Lamp	CCT/W/Lumens <sup>1</sup>	CRI	Finish	Package Quantity
<b>WF6E</b> 6" wafer-thin LED downlight	<b>LED</b> LED	<b>30K</b> 3000K/11.2W/790L <b>40K</b> 4000K/11.2W/840L	<b>90CRI</b> 90 CRI	<b>MW</b> Matte White	<b>CP6</b> 6 units per carton <sup>2</sup>

### Accessories: Order as separate catalog number.

WF6 PAN R12	6" new construction pan, retail pack of 12
WF8643 PAN U	Universal new construction pan, unit pack
WFJB U	Remodel Joist Bar
WFEXC6 U	6' 2 pin FT4 cable
WFEXC10 U	10' 2 pin FT4 cable
WFEXC20 U	20' 2 pin FT4 cable
WF6GR MW JZ	6" round oversized trim ring



### Notes

- Total system delivered lumens.
- Only available with 4000K.

# WF6E 6" Static LED Wafer Module

## PHOTOMETRICS

Distribution Curve


Distribution Data

Output Data

Coefficient of Utilization

Illuminance Data at 30" Above Floor for a Single Luminaire


**WF6E LED 30K 90CRI**, 3000 K LEDs, input watts: 11.2, delivered lumens: 791, LM/W=70.6, test no. ISF 193259



COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD																		
EFFECTIVE FLOOR CAVITY REFLECTANCE: 20%																		
RCC %:	80				70				50				0					
RW %:	Z0																	
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1	1.09	1.04	1.00	.96	1.06	1.02	.98	.84	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2	.99	.91	.84	.78	.96	.89	.82	.71	.85	.80	.75	.82	.77	.73	.79	.75	.72	.70
3	.90	.79	.71	.65	.88	.78	.70	.60	.75	.68	.63	.72	.67	.62	.70	.65	.61	.59
4	.82	.70	.62	.55	.80	.69	.61	.52	.67	.59	.54	.64	.58	.53	.62	.57	.52	.50
5	.76	.63	.54	.47	.74	.62	.53	.45	.60	.52	.46	.58	.51	.46	.56	.50	.45	.43
6	.70	.57	.48	.41	.68	.56	.47	.40	.54	.46	.41	.52	.45	.40	.51	.45	.40	.38
7	.65	.51	.43	.36	.63	.51	.42	.35	.49	.41	.36	.48	.41	.36	.46	.40	.35	.33
8	.60	.47	.38	.33	.59	.46	.38	.32	.45	.37	.32	.44	.37	.32	.42	.36	.32	.30
9	.56	.43	.35	.29	.55	.42	.35	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10	.53	.40	.32	.27	.52	.39	.32	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

ZONAL LUMEN SUMMARY		
ZONE LUMENS % LUMINAIRE		
0-30	218.8	27.7%
0-40	357.1	45.2%
0-60	624.2	78.9%
60-90	166.6	21.1%
0-90	790.8	100%

**WF6E LED 40K 90CRI**, 4000 K LEDs, input watts: 11.2, delivered lumens: 840.2, LM/W=75, test no. ISF 193598



COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD																		
EFFECTIVE FLOOR CAVITY REFLECTANCE: 20%																		
RCC %:	80				70				50				0					
RW %:	Z0																	
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1	1.09	1.04	1.00	.96	1.06	1.02	.98	.84	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2	.99	.90	.84	.78	.96	.89	.82	.71	.85	.80	.75	.82	.77	.73	.79	.75	.72	.70
3	.90	.79	.71	.65	.88	.78	.70	.60	.75	.68	.63	.72	.66	.62	.69	.65	.61	.59
4	.82	.70	.61	.55	.80	.69	.61	.52	.66	.59	.54	.64	.58	.53	.62	.57	.52	.50
5	.76	.63	.54	.47	.74	.62	.53	.45	.60	.52	.46	.58	.51	.46	.56	.50	.45	.43
6	.70	.57	.48	.41	.68	.56	.47	.40	.54	.46	.41	.52	.45	.40	.51	.45	.40	.38
7	.65	.51	.42	.36	.63	.50	.42	.35	.49	.41	.36	.47	.41	.36	.46	.40	.35	.33
8	.60	.47	.38	.33	.59	.46	.38	.32	.45	.37	.32	.44	.37	.32	.42	.36	.32	.30
9	.56	.43	.35	.29	.55	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.27
10	.53	.40	.32	.26	.52	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

ZONAL LUMEN SUMMARY		
ZONE LUMENS % LUMINAIRE		
0-30	231	27.5%
0-40	377.6	44.9%
0-60	662.3	78.8%
60-90	177.9	21.2%
0-90	840.2	100%

## ENERGY DATA & DIMMING CAPABILITY

6" ENERGY DATA		
Color Temperature	3000K	4000K
Lumens	790	840
CRI	90	90
Lumens/Watt	70.5	75
Min. starting temperature	-40°C (-40°F)	-40°C (-40°F)
EMI/RFI	FCC Title 47 CFR, Part 15, Class B	FCC Title 47 CFR, Part 15, Class B
Sound rating	Class A Standards	Class A Standards
Input voltage	120V	120V
Min. power factor	.99	.99
Input frequency	60 Hz	60 Hz
Rated wattage	11.2W	11.2W
Input power	11.2W	11.2W
Input current	0.09A	0.09A

COMPATIBLE DIMMERS			
Lutron	Leviton	Cooper	Belkin
D-603P-WH	6672	DLC03-W	Wemo w/Wifi
DVELV-300P	DW6HD		
300P SELV	DZ6HD		
DV-600PR	6674 - LED/INC mode		
NTELV-300P	RPI06-10Z		
PD-6WCL	IPL06 -10Z LED/INC mode		
MAELV-153MH	IPI06-1LZ		
MAELV-600-WH	IPM10-1LZ		
LECL-153PH-WHB			
CTCL-150H			
PD-5NE-WH			
Caseta Wireless PD-6WCL			