



MARK[®] ARCHITECTURAL LIGHTING

The **Aurora** Series


2x4 T5 Sample Open Office Calculation 50 Foot Candles

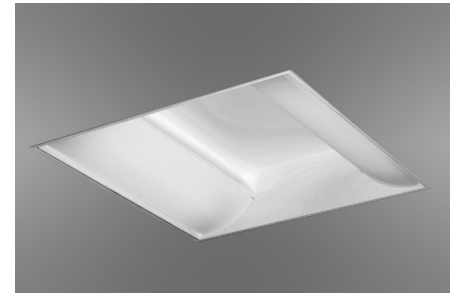


Rendering

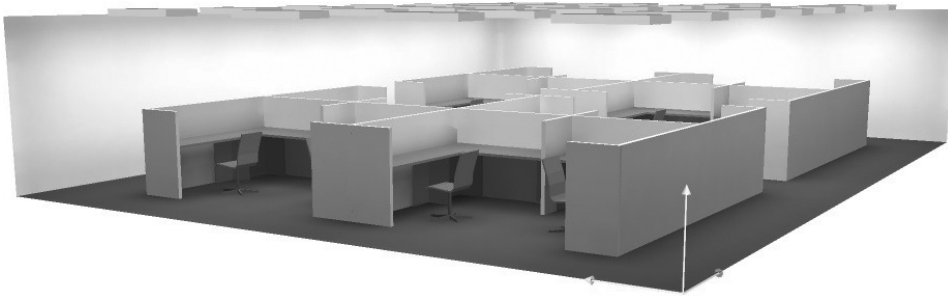

Key Plan

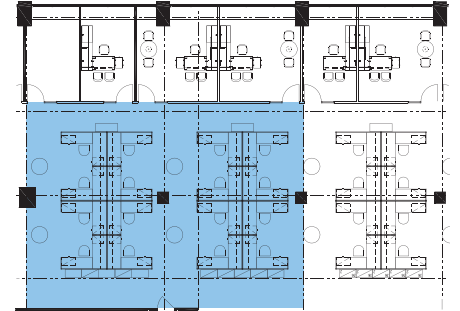

Calculation

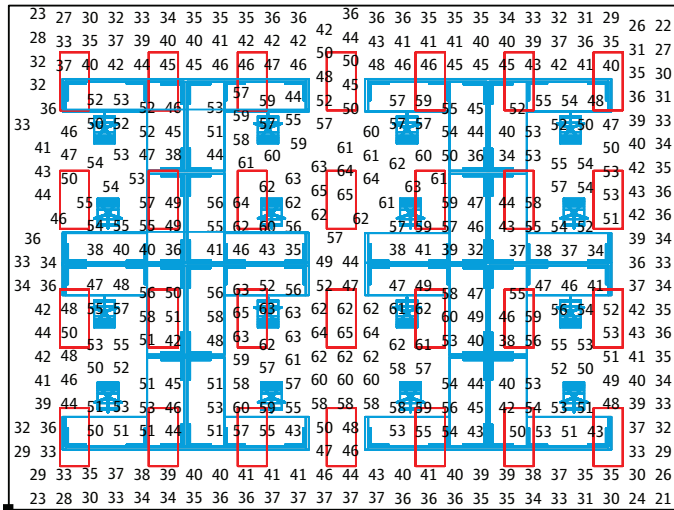

(1.14W/Ft²)

Parameters

FIXTURE SPACING
6'-0" x 8'-0"

FIXTURE
AURORA, #AU-24-2 T5-SWR
FIXTURE SIZE: 2' x 4'
LAMPING: (2) T5
LENS: WHITE RIBBED ACRYLIC
BALLAST: BALLAST FACTOR 0.95
TESTED INPUT WATTS 62.2

LIGHT LOSS FACTORS
LAMP LUMEN DEPRECIATION: 5%
LUMINAIRE DIRT DEPRECIATION: 11%
ROOM DIRT DEPRECIATION: 4%
LAMP BURNOUT: 5%

SPACE DIMENSIONS
W34' x L45' x H8.5'

REFLECTANCES
CEILING: 80%
WALL: 50%
FLOOR: 20%
PARTITION: 40%
FURNITURE: 25%

TASK PLAN
2'-6" A.F.F.

MARK[®] ARCHITECTURAL LIGHTING

2x4 T5 Sample Private Office Calculation 50 Foot Candles

Rendering




Calculation


16	17	20	21	22	23	24	25	25	26	26	25	24	24	22	21	20	19	17	16	
18	19	20	22	23	25	27	28	28	28	28	27	27	25	23	22	21	19	18		
18	20	20	22	23	26	26	28	29	30	32	32	28	30	26	26	22	20	18		
20	22	22	25	26	29	30	32	33	32	34	33	33	32	30	27	26	24	22	20	
21	23	24	27	28	31	32	33	35	33	35	34	33	33	30	27	25	24	23	21	
22	24	24	27	29	32	32	34	36	35	35	34	33	34	31	27	25	24	23	21	
23	25	25	29	30	33	34	36	38	39	39	40	39	37	36	33	31	29	28	25	23
24	26	27	31	32	36	37	39	41	42	42	42	41	39	38	36	33	31	29	27	24
24	27	27	31	33	36	37	40	41	43	43	43	42	40	39	36	34	31	30	27	24
25	27	28	32	33	37	38	41	42	44	44	44	43	41	40	37	35	32	30	27	25
25	27	28	32	34	37	39	41	43	44	44	45	44	42	40	37	35	32	31	27	25
25	28	28	32	34	38	39	42	43	45	45	45	44	42	41	38	36	32	31	28	25
25	27	28	32	34	37	39	42	43	45	45	45	44	42	41	38	35	32	31	28	25
25	27	28	32	34	37	39	41	43	44	45	44	43	41	40	37	35	32	31	28	25
24	27	27	31	33	37	38	41	42	44	44	43	42	40	40	37	35	31	30	27	24
23	25	26	30	31	35	36	38	40	41	41	41	40	38	37	34	33	30	29	26	23
23	25	26	29	31	34	35	38	39	41	41	40	39	38	37	34	32	29	28	25	23
22	24	24	28	29	33	34	36	37	38	39	38	39	37	36	33	31	30	27	25	22
22	24	24	27	29	32	33	35	36	37	38	32	24	23	22	21	30	27	27	24	21
20	21	22	25	26	28	29	31	32	33	33	33	32	31	30	28	27	25	24	22	19
18	19	20	23	24	26	27	29	29	30	30	30	28	28	26	25	23	22	20	18	
18	19	20	22	23	25	26	28	28	29	29	29	27	27	25	24	22	21	19	18	
16	17	17	19	20	22	23	24	25	26	26	26	25	24	24	22	21	19	17	15	
14	15	15	17	17	19	20	21	21	22	22	22	21	20	19	18	17	16	15	13	
14	14	15	16	17	18	19	20	20	21	21	21	20	19	18	17	16	16	14	13	

(1.04W/Ft²)

The Aurora Series

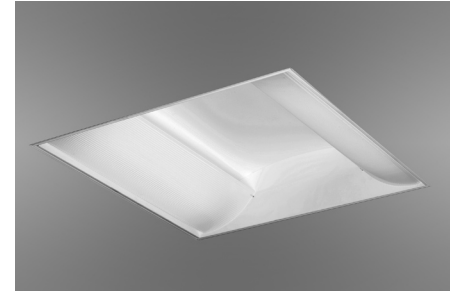

Key Plan

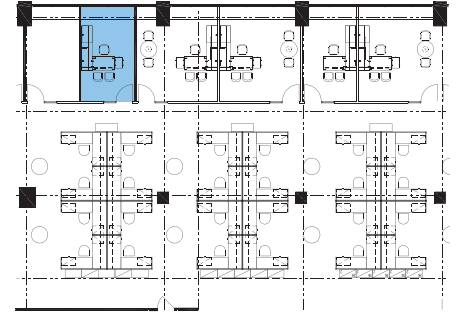

Parameters

FIXTURE SPACING
4'-0"

FIXTURE

AURORA, #AU-24-2 T5-SWR
FIXTURE SIZE: 2' x 4'
LAMPING: (2) T5
LENS: WHITE RIBBED ACRYLIC
BALLAST: BALLAST FACTOR 0.95
TESTED INPUT WATTS 62.2

LIGHT LOSS FACTORS

LAMP LUMEN DEPRECIATION: 5%
LUMINAIRE DIRT DEPRECIATION: 11%
ROOM DIRT DEPRECIATION: 4%
LAMP BURNOUT: 5%

SPACE DIMENSIONS

W10' x L12' x H8.5'

REFLECTANCES

CEILING: 80%
WALL: 50%
FLOOR: 20%
PARTITION: 40%
FURNITURE: 25%

TASK PLAN

2'-6" A.F.F.