


MARK® ARCHITECTURAL LIGHTING

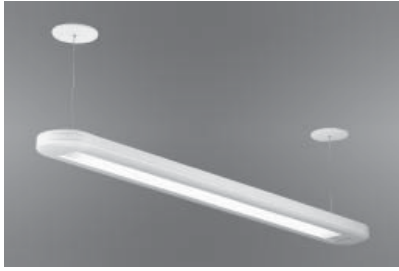

The Focus 58 Series

A low-profile luminaire with clean, crisp lines, Focus 58 is both efficient and versatile. The Focus 58 pendant is available with a variety of shielding choices—including lens, diffuser and louver options—and with a choice of rounded or square end caps. A true performer, it offers efficiencies as high as 86%.

Focus 58 is available in 4- and 8-foot section lengths, and it utilizes T5, T5HO or T8 lamps. A wall-mount version is also available.

Type:

Project:

Catalog Number:

DO NOT TYPE HERE. Autopopulated field.

Specification Features

Housing

Nominal 4' and 8' housings fabricated from heavy-gauge extruded aluminum alloy.

Ends and Connectors

Die-cast aluminum. Ends are half-round or square.

Finish

Matte white.

Reflector

Die-formed, prepainted-white steel.

Shielding

Parabolic diffuse aluminum louver, perforated concave panel, clear linear-ribbed acrylic lens, or soft-white acrylic diffuser panel.

Lamps

(2) T5, T5HO or T8. Lamps provided by others.

Ballast

Thermally protected Class P energy-saving electronic ballast.


Mounting

Pendant mounted with stainless steel cable. Vinyl power feed. 15' length provided as standard; gripper fitting allows quick length adjustment at job site. 18" and 24" steel stems available.

Certification

UL Listed, IBEW (Local 3) Union-made in the USA.

Technical Drawings

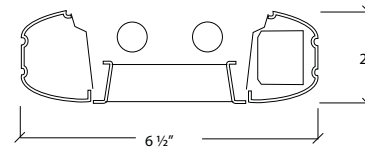

Ordering

Example: FS 4 CG 2T8 EBPR 120 SW IND HR

Series	Length	Mounting	No. of lamps/Lamp type	Ballast	Voltage	Shielding	Designation	Ends	Options
FS Focus 58	4 Nominal 4'	CG Cable and gripper	2 Number of lamps Lamp type T5	EBPR Program rapid start (standard)	120 277 347 ¹	PLSS Parabolic louver	IND Individual	HR Half round	EMPK Emerg. battery pack
	8 Nominal 8'	CGPF Cable, gripper and power feed		T5HO T8		EBIS Instant start	CP Concave perforated panel	BOR Beginning of row	
		S18 18" stem		EDB Dimming (specify)		LR Clear linear-ribbed lens	INT Intermediate		
		S24 24" stem		EDHL Lutron Hi-Lume® dimming		SW Soft-white acrylic	EOR End of row		
				EDE10 Lutron Eco-10® dimming					
				EDES Lutron Eco System®					

Notes

1 Consult factory for lamp and ballast compatibility.