


MARK® ARCHITECTURAL LIGHTING

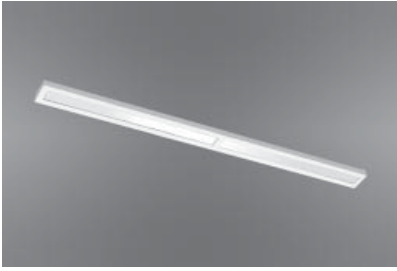

The Planar Series

Planar has a classic look that can fit into almost any business environment from corporate to retail to healthcare, and its 90% efficiency makes it a welcome addition anywhere.

With its small profile (6 by 1 3/4 inches) and multiple length choices (2 to 10 feet), Planar has the flexibility to fit in a variety of spaces and configurations.

Type:

Project:

Catalog Number:

DO NOT TYPE HERE. Autopopulated field.

Specification Features

Housing

Heavy-gauge, one-piece, extruded and mitered aluminum. Internal bracketry is 18-gauge, cold-rolled steel.

Finish

Matte white.

Reflector

Precision-formed diffuse aluminum.

Shielding

Soft-white acrylic diffuser, parabolic diffuse aluminum baffle, or parabolic diffuse aluminum baffle with white acrylic overlay.

Lamps

(1 or 2) T5 or T5HO. Lamps provided by others.

Ballast

Thermally protected Class P energy-saving electronic ballast.

Mounting


Pendant mounted with stainless steel cable (single or split "Y"). Vinyl power feed. 15' length provided as standard; gripper fitting allows quick length adjustment at job site. Consult factory for continuous runs.

Certification


UL Listed, IBEW (Local 3) Union-made in the USA.

Technical Drawings

Split "Y" Hanger
(Shown with baffle)

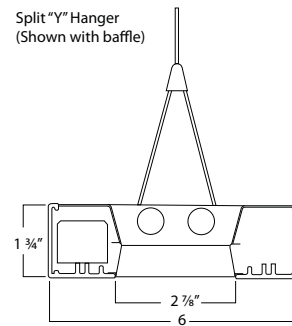

CG Hanger
(Shown with acrylic)

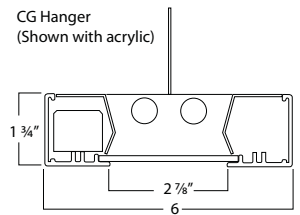

Ordering

Example: PLA 3 SYPF 2T5HO EBIS 120 PB IND

Series	Length	Mounting	No. of lamps/Lamp type	Ballast	Voltage	Shielding	Designation	Options
PLA Planar	2 Nominal 2' 3 Nominal 3' 4 Nominal 4' 6 Nominal 6' 8 Nominal 8' 10 Nominal 10'	SY Split "Y" cable SYPF Split "Y" cable with power feed CG Cable and gripper CGPF Cable, gripper and power feed	Number of lamps 1 2 Lamp type T5 T5HO	EBPR Program rapid start (standard) EBIS Instant start EDB Dimming (specify) EDHL Lutron Hi-Lume® dimming EDE10 Lutron Eco-10® dimming EDES Lutron Eco System®	120 277 347 ¹	SW Soft-white acrylic PB Parabolic diffuse aluminum baffle PBO Parabolic diffuse aluminum baffle with white acrylic overlay	IND Individual BOR Beginning of row INT Intermediate EOR End of row	EMPK Emergency battery pack (limited to 1.18" wide by 1" high)

Notes

1 Consult factory for lamp and ballast compatibility.