


# MARK<sup>®</sup>

## ARCHITECTURAL LIGHTING

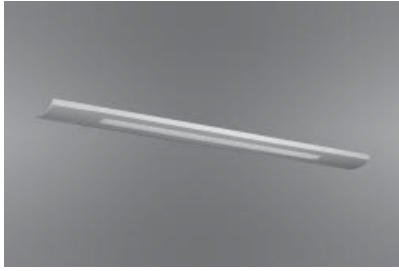

## The Procyon Wall Series

The sleek, shallow profile and refined curve of Procyon Wall are accentuated by contoured die-cast aluminum end caps. The perforated side panels have soft-white acrylic overlay.

Procyon Wall is available in 4- and 8-foot section lengths that accommodate one or two T5 or T5HO lamps. It is the perfect companion for the Procyon pendant.

Type:

Project:

Catalog Number:

DO NOT TYPE HERE. Autopopulated field.

## Specification Features

### Housing

Nominal 4' and 8' housings fabricated from 18-gauge, cold-rolled steel.

### Ends and Connectors

Die-cast aluminum.

### Finish

Matte white.

### Reflector

Die-formed semi-specular aluminum.

### Shielding

Perforated side panels with soft-white acrylic overlay.

### Lamps

(1 or 2) T5 or T5HO. Lamps provided by others.

### Ballast

Thermally protected Class P energy-saving electronic ballast.


### Mounting

Wall-mounted. Units may be continuously rowed.

### Certification

UL Listed, IBEW (Local 3) Union-made in the USA.

## Technical Drawings

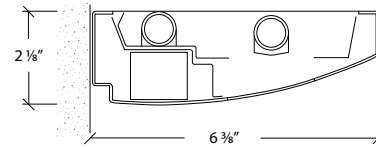

## Ordering

Example: PRW 4 2T5HO EBPR 120 IND

Series	Length	No. of lamps/Lamp type	Ballast	Voltage	Designation	Options
PRW Procyon Wall	4 Nominal 4'	Number of lamps	<b>EBPR</b> Program rapid start (standard) <b>EBIS</b> Instant start <b>EDB</b> Dimming (specify) <b>EDHL</b> Lutron Hi-Lume <sup>®</sup> dimming <b>EDE10</b> Lutron Eco-10 <sup>®</sup> dimming <b>EDES</b> Lutron Eco System <sup>®</sup>	<b>120</b> <b>277</b> <b>347<sup>1</sup></b>	<b>IND</b> Individual <b>BOR</b> Beginning of row <b>INT</b> Intermediate <b>EOR</b> End of row	<b>EMPK</b> Emergency battery pack <b>RFI</b> Radio interference filter <b>GLS</b> GLR fuse and HLR holder
	8 Nominal 8'	Lamp type <b>1 T5</b> <b>2 T5HO</b>				

### Notes

1 Consult factory for lamp and ballast compatibility.