


MARK[®] ARCHITECTURAL LIGHTING

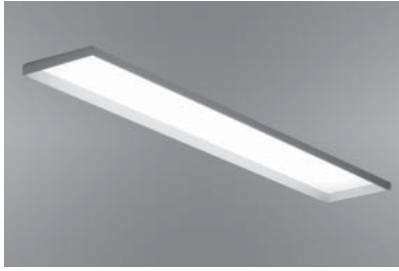

The Ridge Series

Featuring a semi-recessed linear profile, Ridge has a unique form that can provide aesthetic appeal in a wide variety of settings. Its slender micro-groove extruded aluminum trim protrudes just below the ceiling, creating the illusion of being fully recessed.

With multiple length choices and widths of 4, 6 and 8 inches, Ridge offers a wide range of size options. Its shallow plenum depth—just 3 3/8 inches—allows for complete flexibility in design application.

Type:

Project:

Catalog Number:

DO NOT TYPE HERE. Autopopulated field.

Specification Features

Housing

Fabricated from die-formed, 20-gauge, cold-rolled steel. Provided with 7/8"-diameter KOs on top of unit and at either end of housing for through wiring.

Regress Trim

Heavy-gauge extruded aluminum.

Finish

Matte white.

Reflector

Precision-formed steel; white.

Shielding

1/8"-thick matte white acrylic. For other lens options, consult factory.

Lamps

(1) T5 or T5HO for 4"-wide unit; (1) or (2) T5 or T5HO for 6"-wide unit; (2) T5 or T5HO for 8"-wide unit. Lamps provided by others.

Ballast

Thermally protected Class P energy-saving electronic ballast.


Mounting

Recessed direct in 2', 3', 4', 5', 6' and 8' sections.

Certification

cULus Listed, IBEW (Local 3) Union-made in the USA.

Technical Drawings

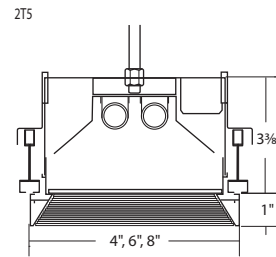

Ordering

Example: RDG 4 6 2T5 EBPR 120

Series	Length	Width	Number of lamps/Lamp type ¹	Ballast	Voltage	Options
RDG Ridge	2 Nominal 2'	4 Nominal 4"	Number of lamps Lamp type ¹	EBPR Program rapid start (standard)	120	EMPK Emergency battery pack
	3 Nominal 3'	6 Nominal 6"	1 T5	EBIS Instant start	277	CP Chicago plenum
	4 Nominal 4'	8 Nominal 8"	2 T5HO	EDB Dimming (specify)	347 ²	
	5 Nominal 5'			EDHL Lutron Hi-Lume [®] dimming		
	6 Nominal 6'			EDE10 Lutron Eco-10 [®] dimming		
	8 Nominal 8'			EDES Lutron Eco System [®]		

Notes

- 1 Consult factory for other lamps.
- 2 Consult factory for lamp and ballast compatibility.