


MARK[®] ARCHITECTURAL LIGHTING

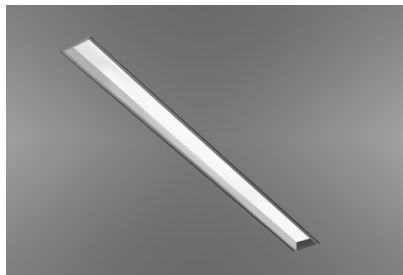

The Slot 2 LED Series

Slot 2 LED combines the very slender styling of Slot 2 with a diminutive LED light source to provide a luminaire that is perfect where visually harmonious illumination and energy efficiency are desired.

Standard lengths range from 2 to 8 feet, and a unique 2'x2' configuration is ideal as a creative design element. Custom lengths and configurations are also available. Slot 2 LED features a snap-in clear frosted acrylic lens, which can be positioned flush or regressed, and universal mounting detail for sheetrock or various tile grid ceilings.

Type:

Project:

Catalog Number:

DO NOT TYPE HERE. Autopopulated field.

Specification Features

Housing

Nominal 2" wide x 2', 3', 4', 5', 6' or 8' long units fabricated from heavy-gauge extruded aluminum.

Finish

Matte white.

Reflector

98% high reflectance.

Shielding

Snap-in extruded clear frosted acrylic (flush or regressed).

Lamps

Board of 24V LED lamps. Available in 3000K, 3500K or 4000K color temperature.

Driver

Electronic, 75W max. 120-277V input and 24V output.

Mounting


Recessed universal mounting bracket accommodates sheetrock or various acoustical tile grid ceilings. Consult factory for other ceiling types.

Certification

CSA-US Listed, IBEW (Local 3) Union-made in the USA.

Technical Drawings

2x2 w/ CLG. tile at center



Ordering

Example: SL2 4 1/L35 UNIV 35 EDVR 120 FA










| Series | Length/size | No. of Boards per section/LED Color Temp (K) | Ceiling type | Driver | Voltage | Shielding | | | | | | | | | | | | | | | | | |
|--------|-------------|--|---|-------------------|---------|------------------------------|---|-----|-----------|---|------|--|-----|----|-----------------------------------|-----|-----------|-------|---|-----|-----------|--------|---|
| SL2 | Slot2 | 2 | 2' | UNIV ¹ | EDVR | Electronic driver (75W max.) | | | | | | | | | | | | | | | | | |
| | | 3 | 3' | | | | 1 | L30 | LED 3000K | Universal sheetrock, 9/16" or 15/16" inverted tee slot grid | EDIM | Electronic driver (75W max.) and 0-10V dimming interface | 120 | FA | 3/32" thick clear frosted acrylic | | | | | | | | |
| | | 4 | 4' | | | | | | | | | | | | | L35 | LED 3500K | EDVRM | Electronic driver (75W max.) for remote mount | | | | |
| | | 5 | 5' | | | | | | | | | | | | | | | | | L40 | LED 4000K | EDIMRM | Electronic driver (75W max.) 0-10V dimming interface for remote mount |
| | | 6 | 6' | | | | | | | | | | | | | | | | | | | | |
| | | 8 | 8' | | | | | | | | | | | | | | | | | | | | |
| | | — ft. | Specify continuous run length (in whole feet) | | | | | | | | | | | | | | | | | | | | |
| 2x2 | 2' x 2' | | | | | | | | | | | | | | | | | | | | | | |

Notes

1 Order fixture with remote driver for a space with non accessible ceiling. The remote distance of the driver would be max. of 12 feet on an 18ga wire.

Delivered Lumens

INITIAL BOARD DELIVERED LUMENS
(one board/two boards in cross section, lm)

| | | 3,000K | 3,500K | 4,000K |
|-------|---|---------------|---------------|---------------|
| 2'x2' |  | 3,740 | 3,528 | 4,128 |
| 1' |  | 430 | 441 | 514 |
| 2' |  | 860 | 882 | 1,028 |
| 3' |  | 1,290 | 1,323 | 1,542 |
| 4' |  | 1,720 | 1,764 | 2,056 |
| 5' |  | 2,150 | 2,205 | 2,570 |
| 6' |  | 2,580 | 2,646 | 3,084 |
| 7' |  | 3,010 | 3,087 | 3,598 |
| 8' |  | 3,440 | 3,528 | 4,112 |

OTHER LENGTHS AVAILABLE, CONSULT FACTORY