

# MARK<sup>®</sup> ARCHITECTURAL LIGHTING



## The Slot 2 Series

At a nominal 2 inches wide, Slot 2 is the thinnest member of the Slot family of products. These long, narrow channels of light allow you to achieve both optimum illumination and ideal design. Standard lengths range from 2 to 8 feet, and custom lengths are also available.

Slot 2 is available with a snap-in frosted clear acrylic lens or parabolic baffle. The extruded acrylic shielding can be flush or regressed, and its universal mounting detail accommodates sheetrock or various tile grid ceilings.

Type:

Project:

Catalog Number:

DO NOT TYPE HERE. Autopopulated field.

## Specification Features

### Housing

Nominal 2" wide x 2', 3', 4', 5', 6' or 8' long units fabricated from heavy-gauge extruded aluminum.

### Finish

Matte white.

### Reflector

Precision-formed steel; white.

### Shielding

Snap-in extruded frosted clear acrylic (flush or regressed) or parabolic baffle.

### Lamps

(1) T5 or T5HO lamp, in-line or staggered.

### Ballast

Thermally protected Class P energy-saving electronic ballast.


### Mounting

Recessed universal mounting bracket accommodates sheetrock or various acoustical tile grid ceilings. Consult factory for other ceiling types.

### Certification

cULus Listed, IBEW (Local 3) Union-made in the USA.

## Technical Drawings

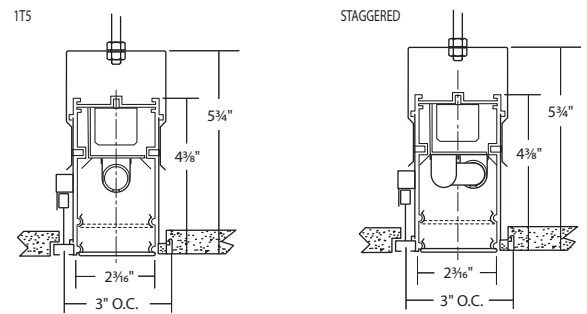

## Ordering

Example: SL2 4 UNIV 1T5 EBIS 120 FA

Series	Length	Ceiling type	No. of lamps/Lamp type	Ballast	Voltage	Shielding	Options	
SL2 Slot 2 (flush or regressed)	2 2'	UNIV Universal sheetrock, 9/16" or 15/16" inverted tee slot grid	Number of lamps 1	Lamp type T5 T5HO T5S <sup>1</sup> T5HOS <sup>1</sup>	EBPR Program rapid start (standard) EBIS Instant start EDB Dimming (specify) EDHL Lutron Hi-Lume <sup>®</sup> dimming EDE10 Lutron Eco-10 <sup>®</sup> dimming EDES Lutron Eco System <sup>®</sup>	120 277 347 <sup>2</sup>	PB Parabolic baffle, diffuse aluminum FA 3/32" thick clear frosted acrylic	EMPK Emergency battery pack <sup>3</sup> CP Chicago plenum
	3 3'							
	4 4'							
	5 5'							
	6 6'							
	8 8'							
	__ ft. Specify continuous run length (in whole feet)							

### Notes

- 1 S = Staggered lamping.
- 2 Consult factory for lamp and ballast compatibility.
- 3 4', 6', and 8' units only.