

MARK[®] ARCHITECTURAL LIGHTING



The **Whisper** Series

Gently sloping side panels give Whisper its depth and appealing angles. Whether units are installed in rows or individually, the look is artfully clean and simple.

Multiple lens options for the center and side panels allow you to achieve the appropriate design and illumination for each space. Whisper is available in 1' x 4', 2' x 2' and 2' x 4' sizes, and it fits perfectly in a variety of business and institutional settings including offices, schools and hospitals.

Type:

Project:

Catalog Number:

DO NOT TYPE HERE. Autopopulated field.

Specification Features

Housing

Nominal 1'x4', 2'x2' or 2'x4' housings fabricated from 20-gauge, cold-rolled steel.

Finish

Matte white.

Reflector

Precision-formed steel; white.

Shielding

Center Panel: Clear linear, soft-white acrylic or K20 prismatic lens. Side Panels: Clear linear, soft-white acrylic or K20 prismatic lens.

Lamps

(1) or (2) T5, T5HO or T8 for 1'x4', or 2'x4'; (2) T5, T5HO, T8, 40W BX or 50W BX for 2'x2'.

Ballast

Thermally protected Class P energy-saving electronic ballast.


Mounting

Recessed, lay-in extruded aluminum trim. Accommodates 9/16" slot grid or 15/16" inverted tee, or 9/16" inverted tee.

Certification

cULus Listed, IBEW (Local 3) Union-made in the USA.

Technical Drawings

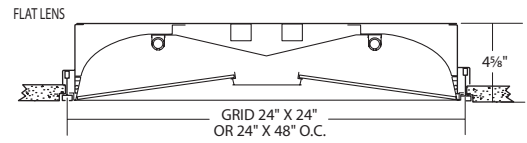

Ordering

Example: WHS 22 2T5 EDB 120 LR SW

Series	Size	No. of lamps/Lamp type ^{1,2}	Ballast	Voltage	Shielding.Center	Shielding.Sides	Options	
WHS Whisper	14 1' x 4'	Number of lamps ¹	EBPR Program rapid start (standard) EBIS Instant start EDB Dimming (specify) EDHL Lutron Hi-Lume [®] dimming EDE10 Lutron Eco-10 [®] dimming EDES Lutron Eco System [®]	120 277 347³	SW Soft-white acrylic LR Clear, linear-ribbed acrylic K20 Clear prismatic acrylic	SW Soft-white acrylic LR Clear, linear-ribbed acrylic K20 Clear prismatic acrylic	EMPK Emergency battery pack CP Chicago plenum AR Air return 35 3 1/2" depth (T5 only)	
	22 2' x 2'	1						T5
	24 2' x 4'	2						T5HO
								T8
			40 BX					
			50 BX					

Notes

- Lamps per cross section. See configurations table.
- Consult factory for other lamps.
- Consult factory for lamp and ballast compatibility.

CONFIGURATIONS

SIZE	LAMPS PER CROSS SECTION	LAMPS PER FIXTURE	LAMP TYPE
1' x 4'	1, 2	1, 2	T5, T5HO, T8
2' x 2'	2	2	T5, T5HO, T8, 40BX, 50BX
2' x 4'	1, 2	1, 2	T5, T5HO, T8

Photometric Information

Catalog Number

WHS 24 2T5

Report Number


LTL16371

Lamps

(2) T5, rated 2600 lumens per lamp

Total Efficiency

85.3%

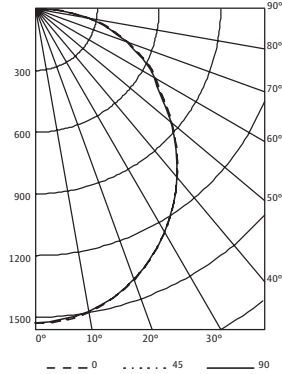

Floor	20%									
Ceiling	80%			50%			30%			
Walls	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%
0	102	102	102	102	95	95	95	91	91	91
1	92	87	83	80	82	79	76	78	76	74
2	83	76	70	64	71	66	62	68	64	61
3	76	66	59	53	62	56	52	60	55	51
4	69	59	51	45	55	49	44	53	48	43
5	64	52	44	39	49	43	38	48	42	37
6	59	47	39	34	45	38	33	43	37	33
7	54	43	35	30	41	34	29	39	33	29
8	51	39	32	26	37	31	26	36	30	26
9	47	36	29	24	34	28	24	33	28	23
10	44	33	26	22	32	26	21	31	25	21