


Low-Profile Wraparounds

LB

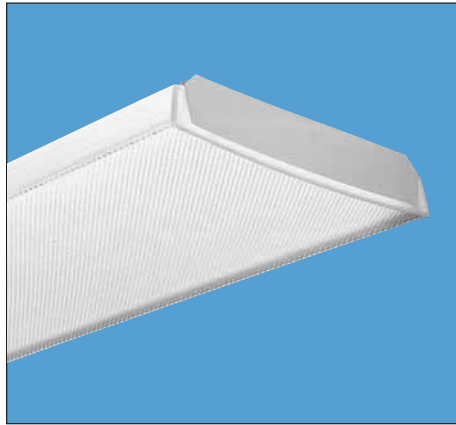

Ordering Information

Series	Number of lamps
LB Standard width	2
2LB 2 lamps in wide housing	3
	4

Fortandem double-length unit, add prefix **T**. Example: **TLB**
Not included.

Intended Use

For applications requiring a clean, decorative appearance. Provides high vertical illumination and brightness control.

Features

Acrylic prismatic diffuser with sonic-welded, injection-molded, luminous ends. Matches CB Series in appearance.

White enamel end plates – optional appliques available for field installation.

Linear side prisms control brightness; pyramidal bottom prisms minimize lamp image.

Continuous, interlocking-diffuser support prevents accidental opening, simplifies cleaning and service.

For surface or stem mounting, unit or row installation. Snap-in aligners permit row mounting without tools.

Minimum two hangers required. For row installation, one hanger per fixture plus one per row required. Four single-stem hangers required for 3-lamp versions.

Listings

UL Listed (standard) and CSA Certified (standard; except for 347V – see Options). NOM Certified (see Options).

Lamp type	Voltage
17 17W T8 (24")	MVOLT
20 20W T12 (24")	120
32 32W T8 (48")	277
	347

Example: LB 2 32 MVOLT GEB10IS

Options
1/3 One 3-lamp ballast
1/4 One 4-lamp ballast
GEB10IS T8 electronic ballast, ≤10% THD, instant start
GEB10RS T8 electronic ballast, ≤10% THD, rapid start
CSA CSA Certified (347V only)
NOM NOM Certified

See page 112 for others.

Accessories (Order separately)

Order one pair per fixture or row

- LB2W*** Walnut end plate appliques for narrow body, one pair.
- LB4W*** Walnut end plate appliques for wide body, one pair.

* For teak appliques, substitute **T** for **W** in catalog number. Example: **LB2T**.

Availability and Dimensions						
Series	Lamps per cross section	Lamps per fixture	Lamp length in.	Width in. (cm)	Depth in. (cm)	Length in. (cm)
LB	2	2	24	10 (25.4)	3 (7.6)	24 (61.0)
	4	4	24	15 ³ / ₈ (39.1)	3 (7.6)	24 (61.0)
LB	2	2	48	10 (25.4)	3 (7.6)	48 (121.9)
	3	3	48	15 ³ / ₈ (39.1)	3 (7.6)	48 (121.9)
2LB	4	4	48	15 ³ / ₈ (39.1)	3 (7.6)	48 (121.9)
	2	2	48	15 ³ / ₈ (39.1)	3 (7.6)	48 (121.9)
TLB	2	4	48	10 (25.4)	3 (7.6)	96 (243.8)
	3	6	48	15 ³ / ₈ (39.1)	3 (7.6)	96 (243.8)
T2LB	4	8	48	15 ³ / ₈ (39.1)	3 (7.6)	96 (243.8)
	2	4	48	15 ³ / ₈ (39.1)	3 (7.6)	96 (243.8)

lightquick[®] XD
Express delivery products.
See page 11 for details about LightQuick XD.

Description

LB 4 32 MVOLT 1/4 GEB10IS

LB 2 32 MVOLT GEB10IS