



Catalog Number	
Notes	Type


FEATURES

Remote stations provide activation of control functions in conjunction with Sequel family control stations. The SQRS offers simple user interface and architectural styling.

- Thin architectural styling
- Single-gang mounting
- LED preset indication
- Engraved OFF button cap
- Optional custom engraving
- Metallic and painted faceplates

Dimming Systems **SQRS**

Remote Station

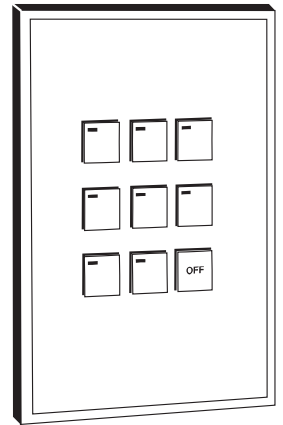

SEQUEL[®] MiniPac[®]

ORDERING INFORMATION

Example: **SQRS2S BJ4**

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog number.

SQRS__		
Series	Number of buttons*	Finish
SQRS	2S 2 buttons 4S 4 buttons 5S 5 buttons 6S 6 buttons 9S 9 buttons	BJ4 Brushed stainless steel, black frame and buttons BL4 Painted black, black frame and buttons WC2 Painted white, white frame and buttons IE3 Painted ivory, ivory frame and buttons BF4 Polished brass, black frame and buttons

* Consult factory for availability of button counts other than those listed.

Accessories

	Order as separate item.
SQRS 1GB	Single-gang masonry backbox
BKLE 10P	Engraved button caps, 10 pack

SPECIFICATIONS

FUNCTIONAL

- Switch function is determined by terminal block position at the control station or remote station interface.
- Available functions include preset recall (with LED), channel raise, channel lower, channel on, channel off, master raise, master lower, *off*, *on* (recalls last state before OFF) and select. No LED is provided for raise/lower, *on* and *off* functions.

CAPACITIES

- Two, four, five, six or nine buttons.

ENGRAVED BUTTON CAPS — BKLE (ACCESSORY)

- Characters are upper case Block Normal type style. Maximum two lines per button cap, seven characters per line.
- Characters are back filled with a contrasting color as follows: (cap color/back fill color) white/medium gray, ivory/beige, and black/medium gray.

ELECTRICAL

- Operating voltage: 5 VDC, low voltage Class 2.
- Wiring Connections: Screw terminals, one #18 AWG (1mm) per switch, plus one #18 AWG (1mm) common. For multiconductor cable installations, use low capacitance, nontwisted cable similar to Belden 83653, 83662 or equal. For wire lengths greater than 350 feet (100m), include one spare drain conductor or use shielded cable.

MECHANICAL

- Mounts to a SQRS 1GB or other 2" wide single-gang masonry backbox equal to RACO 690 or Steel City GW-125G. Faceplate held to frame by magnetic strips.

DIMENSIONS

All dimensions are in inches (millimeters).

