

Ratio™ Parking Garage 1.5 TLRPG15

Catalog Number:

Type:


Project:



TLRPG15	72 LED100MA	41K	SYM	120	PDM	SF	FG	DWH
Series	Lumen Package	LED Color	Distribution	Voltage	Mounting Method	Options	Accessories	Finish
TLRPG15	72 LED100MA 72 LED 220MA 72 LED 350MA	35K 41K 56K	SYM ASM	120 ⁸ 208 ⁸ 240 ⁸ 277 ⁸ 347 ^{Cal Factory} 480 ^{Cal Factory}	PDM ¹ Pendant SRM ² Surface TNM ⁷ Trunnion	SF Single Fuse DF Double Fuse SPD6KV Surge Protection SPD10KV Surge Protection	FG ³ Fowl Guard STEM 12 ⁴ 12" Stem STEM 18 ⁴ 18" Stem STEM 22 ⁴ 22" Stem SLVRD ⁵ Self-leveling for round or Oct J-box SLVSQ ⁵ Self-leveling for square J-box	DDB Dark Bronze DNA Natural Aluminum DWH White CM Custom Match CS Custom Select RAL

1. Pendant mounts to 3/4" NPT stem by others or as a separate optional accessory
2. Surface mounts to J-Box by others. Mounting plate and cable included. Ships with fixture
3. FG: Fowl Guard for Pendant mount only. Shipped Separately
4. STEMxx: 3/4" NPT stem. Not Finish Painted. Shipped Separately
5. SLVRD or SLVSQ: Self leveling pendant mount swivel plate for Round/Octagonal or Square J-Box. Not finish painted. Shipped Separately
6. Consult factory for Custom match finish
7. Trunnion mounting hardware not finish painted and shipped separately
8. 120-277 uses MVOLT driver. (Asking for specific voltage for Surge Protection)

Note: See following pages for details.

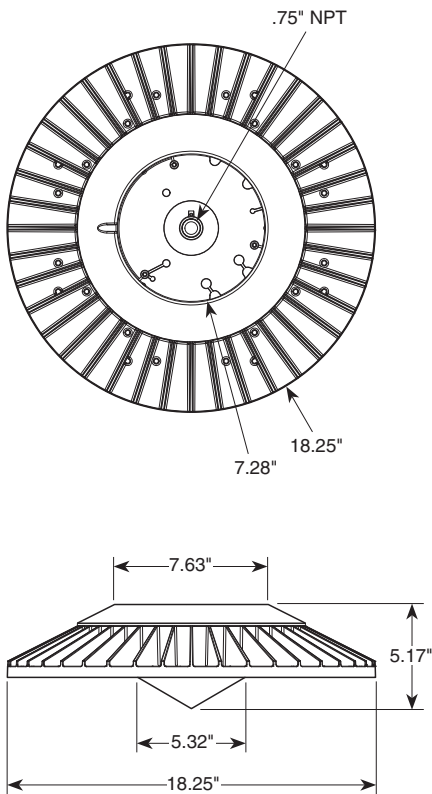

Construction:

Die-cast, low copper (<0.6% Cu) aluminum alloy Housing. All mechanical fasteners are corrosion resistant and hangers are galvanized steel.

Finish:

The powder coated finish uses TGIC polyester powder. The finish is a three-stage process that consists of drying, powder application and curing. Before curing, the parts are treated with a five-stage pretreatment process, consisting of a heated alkaline cleaner, rinse, phosphate coating, rinse and sealant.

Optics:

Precision injection molded acrylic optics are designed to meet multiple applications, bi-directional, uni-directional and pedestrian walk/ drive lanes.

Electrical:

All electrical components are UL recognized and mounted directly to the electrical housing for maximum heat dissipation. Fixture includes a driver with optional fusing and surge protector.

Installation:

Mounting: Fully silicone-gasketed, galvanized steel plate. Surface mounts to recessed box or pendant mounts to industry standard J-boxes. The quick-mounting bracket includes a tether for the fixture, allowing for trouble-free electrical connections. The fixture twist-locks into place in a firm, secure fashion.

Listings:

The luminaire is tested to and meets all NRTL's outdoor requirement standards, wet location use, through the fully accredited and approved CSA laboratory.

Note:




Consult factory for availability.

WARNING: Tersen reserves the right to modify specifications without notice.



Ratio™ Parking Garage 1.5 TLRPG15

ORDERING GUIDE

Series	<input type="checkbox"/> TLRPG15 <u>Tersen Luminaire - Ratio Parking Garage</u>
Lumen Package	<input type="checkbox"/> 72 LED 100 mA <input type="checkbox"/> 72 LED 350 mA <input type="checkbox"/> 72 LED 220 mA
LED Color	<input type="checkbox"/> 35K 3500K <input type="checkbox"/> 41K 4100K <input type="checkbox"/> 56K 5600K
Distribution	<input type="checkbox"/> SYM Symmetric <input type="checkbox"/> ASY Asymmetric
Voltage	<input type="checkbox"/> 120 <input type="checkbox"/> 208 <input type="checkbox"/> 240 <input type="checkbox"/> 277 <input type="checkbox"/> 347 Call Factory <input type="checkbox"/> 480 Call Factory
Mounting Method	<input type="checkbox"/> PDM Pendant Mount <input type="checkbox"/> SRM Surface Mount <input type="checkbox"/> TNM Trunnion Mount
Options	<input type="checkbox"/> SF Single Fuse <input type="checkbox"/> DF Double Fuse <input type="checkbox"/> SPD6KV Surge Protection Device <input type="checkbox"/> SPD10KV Surge Protection Device
Accessories	<input type="checkbox"/> FG Fowl Guard <input type="checkbox"/> STEM 12 12" Stem <input type="checkbox"/> STEM 18 18" Stem <input type="checkbox"/> STEM 22 22" Stem <input type="checkbox"/> SLVRD Self-leveling swivel plate for round or oct J-box <input type="checkbox"/> SLVSQ Self-leveling swivel plate for square J-box
Finish	<input type="checkbox"/> DDB Dark Bronze <input type="checkbox"/> DNA Natural Aluminum <input type="checkbox"/> DWH White <input type="checkbox"/> CM Custom Match <input type="checkbox"/> CS Custom Select    This choice requires that a custom powder be manufactured to match a specific color chip provided by the specifier. Tersen offers custom selected RAL powder coat colors. See chart (form 794.3) for cataloged optional colors or contact the factory.