


2 Lamp Profile 1x4 Specification Grade Recessed Troffer with Acrylic Lens and Normal Beam White Reflector

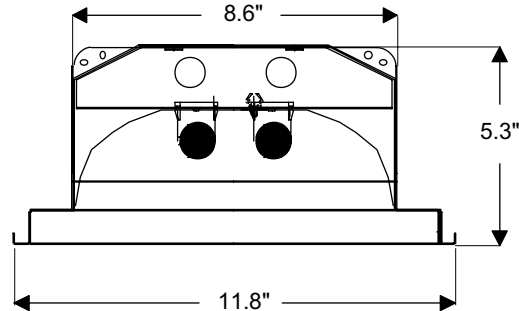

APPLICATIONS

The TG series of grid troffers is a versatile line of specification luminaires with a range of features to customize light output and suit specific needs. Typical applications include offices, schools, hospitals and retail interiors.

FEATURES

The removable reflector is finished with a premium high reflectivity white paint to provide a fixture efficiency of 69.1%.

The 5.3" deep fixture is available with air-handling capability or static, with a regressed aluminum door equipped with spring-loaded cam latches or with a flush steel door and rotary cam latches.

Easy wiring and service are provided by the top-mounted quick access wiring plate, and by the removable ballast cover, which is secured by quarter-turn fasteners.

SPECIFICATIONS

HOUSING : 22 gauge cold rolled steel housing is extremely rigid and fully assembled with rivets. Exterior surfaces are finished with 86% reflectivity high gloss white polyester paint.

REFLECTOR : Made with 90% reflectivity white metal. Reflector profile is computer optimized and precision fabricated.

LENS : Pattern 12 clear virgin acrylic lens (A12) 0.110" or (B12) 0.125" thick.


LAMP HOLDERS : Vossloh rotary-lock lampholders offer superior contact between lamps and electrical connections, and provide long-term lamp service and access.

MOUNTING : The TG troffer is suitable for mounting in NEMA type "G" ceiling systems.

APPROVALS : All TG troffers are UL and CUL listed. City of New York approved fixtures are also available.

TGS14DNA12042 PHOTOMETRY

Certified by Holophane Corporation, Newark, Ohio.
Photometric test report #48343

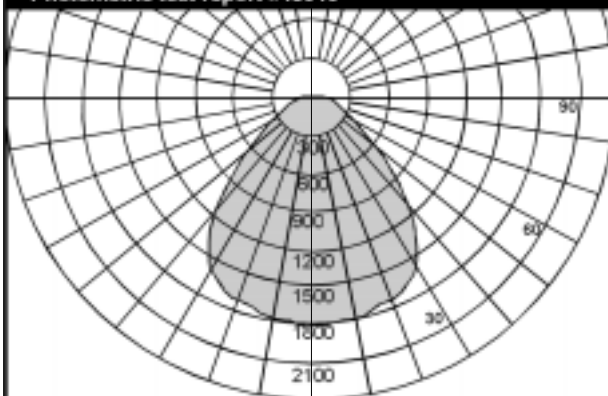





Efficiency = 66.5%, S/MH = 1.3


COEFFICIENTS OF UTILIZATION

CC Wall	80				70				50				30			
	70	50	30	10	70	50	30	10	50	30	10	50	30	10		
RCR 0	.79	.79	.79	.79	.77	.77	.77	.77	.74	.74	.74	.71	.71	.71		
1	.73	.70	.68	.66	.71	.69	.67	.65	.66	.64	.63	.64	.62	.61		
2	.67	.63	.59	.55	.66	.61	.58	.55	.59	.56	.53	.57	.54	.52		
3	.62	.56	.51	.47	.61	.55	.51	.47	.53	.49	.46	.51	.48	.45		
4	.58	.50	.45	.41	.56	.50	.45	.41	.48	.44	.40	.46	.43	.40		
5	.53	.46	.40	.36	.52	.45	.40	.36	.43	.39	.36	.42	.38	.35		
6	.50	.41	.36	.32	.48	.41	.36	.32	.40	.35	.32	.39	.34	.31		
7	.46	.38	.32	.29	.45	.37	.32	.29	.36	.32	.28	.35	.31	.28		
8	.43	.35	.29	.26	.42	.34	.29	.26	.33	.29	.26	.33	.28	.25		
9	.40	.32	.27	.23	.39	.32	.27	.23	.31	.26	.23	.30	.26	.23		
10	.38	.30	.25	.21	.37	.29	.25	.21	.29	.24	.21	.28	.24	.21		

BODY OPTIONS AND LENS DESCRIPTION

Air Feature / Door Frame Option	Fixture Body Gauge	
	22 Ga (std)	20 Ga (NYC)
 Static - No Reveal Flush Steel Door Rotary Cam Latches	S	T
 Static - No Reveal Regressed Aluminum Door Spring Loaded Latches	R	Q
 Air Handling - Black Reveal Regressed Aluminum Door Spring Loaded Latches	A	B
 Static - Black Reveal Regressed Aluminum Door Spring Loaded Latches	N	M

Pattern 12 Acrylic Lens



Lens is manufactured from non-yellowing clear virgin acrylic and provides low surface brightness and excellent lamp obscuration. The bottom surface of the lens features standard pattern 12 prism array, and the upper surface is smooth.

MODELS AVAILABLE

The TG series of recessed troffers is a versatile line of products with a range of features that provide the opportunity to customize light output to suit specific application needs. The fixture code indicates the series, body gauge and door option, size, reflector material type, photometric beam, louver type, lamp quantity and configuration, and ballast type, quantity and voltage. Tandem combinations are also available and are indicated by a number (2, 3 or 4) placed in front of the code below. Please contact the factory for additional information.

Fixture Schedule

Fixture ID

