

PRODUCT INFORMATION

LQC

Quantum® Die-Cast Aluminum



Intended Use
Ideal for applications requiring general-purpose emergency lighting exit sign.

Construction
Die-cast aluminum construction - compact housing. Brushed aluminum faceplate with matte black electrostatic polymeric trim. Clear lacquer finish on brushed face inhibits fingerprints and other surface contaminants. Also available in white housing and face.

Fully overlapping light seal prevents light leaks. Universal direction chevron knockouts are concealed and easily removed.

Provisions for conduit entry and pendant mounting.

U.S. Patent No. 5,739,639. Other patents pending.

Expected LED life of more than 10 years.

Universal (top, end or back mounting). Completely concealed, easily removed

mounting knockouts and hole plugs. No exposed hardware. Die-cast aluminum canopy provided. Faceplate accessory kit available for one-face to two-face field conversion.

Dual-voltage input capability 120 or 277 VAC. Emergency models provided with test-switch, status indicator and a battery that automatically recharges when normal power is restored.

Emergency models provided with maintenance-free, sealed

nickel-cadmium battery to provide 90 minutes of emergency power if necessary.

Listings
UL Listed. Meets UL924. Damp location listing 50° to 104°F (10° to 40°C) standard.



ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

Example: LQC 1 R EL N

Series	Housing	Number of faces	Letter color	Options
LQC LED	(blank) Matte black, brushed aluminum face	1 Single face	R Red	(blank) AC only 120/277V
	W White	2 Double face	G Green	ELN 120/277 VAC input with nickel-cadmium battery back-up

ADDITIONAL INFORMATION


For additional product information, visit www.lithonia.com.

ELECTRICAL APPLICATION DATA

TYPE	VOLTAGE	INPUT WATTS	MAXIMUM AMPS
Standard LED Red	120	.6	.05
Standard LED Red	277	.7	.06
Standard LED Green	120	1.0	.05
Standard LED Green	277	1.2	.06
Emergency LED Red	120	.6	.05
Emergency LED Red	277	.7	.06
Emergency LED Green	120	1.0	.05
Emergency LED Green	277	1.2	.06

Drawings are for dimensional detail only and may not represent actual mechanical configuration. Dimensions are shown in inches (centimeters) unless otherwise noted.

Shipping weight 4.5 lbs (2.0 kg)

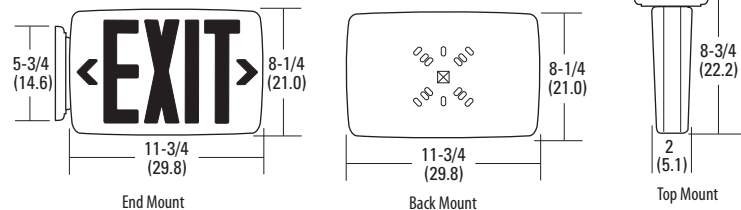

ACCESSORIES

ORDER SEPARATELY

ELA WG1	Back-mount wireguard
ELA WGEXT	Top-mount wireguard
ELA WGEXE	End-mount wireguard
ELA B US12	12" pendant-mount kit with black canopy. To order white canopy, replace B with W in catalog number. To order 24" or 36" lengths, replace 12 with 24 or 36.
ELA LQCFCPK	Brushed/black faceplate kit with red and green sign panel for one-face to two-face field conversion
ELA W LQCFCPK	White faceplate kit with red and green sign panel for one-face to two-face field conversion