

FEATURES & SPECIFICATIONS

INTENDED USE — The RT5RT relight assembly is the ideal solution for renovating obsolete parabolic or lensed troffer systems, delivering improved quality of light and refreshing the space. RT5RT volumetric lighting eliminates the “cave effect” by delivering the ideal amount of light to walls, work surfaces, and people.

The RT5RT relight assembly is recommended for schools, offices, hospitals and other general lighting applications. **Certain airborne contaminants can diminish integrity of acrylic.** [Click here for Acrylic Environmental Compatibility table for suitable uses.](#)

CONSTRUCTION — Universal end brackets containing the pre-wired ballast and sockets are constructed of 20-gauge powder-painted steel and are secured to the host fixture with provided TEK screws. A splice box is provided to enclose electrical connections, and a ballast disconnect plug system is provided as standard.

The reflector system uses a highly reflective white finish for optimum efficiency and attaches securely to the end brackets with quarter-turn fasteners. A one-piece trim assembly serves as the instrument that delivers the light. Molded and recyclable PETE (polyethylene) reflector is firmly attached to the universal bracket via reliable hinge and latch assembly. Included as part of the trim assembly are two linear prismatic acrylic refractors with light-diffusing finish for even illumination and lamp obscuration. Trim kit to cover side reveals (if necessary) is provided as standard.

Splice box replaces the typical wireway by providing a cover for the connections of incoming supply wire and is attached to the host fixture with two TEK screws.

OPTICS — Luminous characteristics are carefully managed at high angles, providing just enough intensity to develop the volumetric effect. Regressed, one-piece refractive system obscures and softens the lamp and smoothly washes the reflector with light. Linear faceted reflectors soften and distribute light into the space, and minimize the contrast between the fixture and the ceiling. Mechanical cutoff across the reflector and fresnel refraction along the reflector provide high-angle shielding and a quiet ceiling.

Sloped endplates provide a balanced fixture-to-ceiling ratio while enhancing the perception of the fixture depth.

ELECTRICAL — Lamp type options include high-efficiency F14T5 or F24T5HO with enhanced phosphors and 85CRI. All lamps are TCLP compliant. Ballasts are high-efficiency, program-start electronic, Class P, thermally protected, resetting, HPF, non-PCB, UL Listed, CSA Certified, sound rating A. F14T5 uses GEB115, producing 1.22 ballast factor standard for typical applications. F24T5HO is available for higher ceiling applications.

Bi-level dimming option allows system to be switched to 50% power for compliance with common energy codes while maintaining fixture appearance.

SIMPLY5™ lighting intelligence system with multi-level dimming and direct-wire capability is available. For additional information, consult specification sheet at www.simply5.net.

INSTALLATION — Trim hinges from either side. Lamp access by hinging trim down to 90°; providing hands-free access to lamps. For hands-free ballast access, continue process by removing two quarter-turn latches and remove reflectors.

LISTINGS — UL/dJL Classified. Labeled for use in air-handling fixtures. Does not impact existing fixture UL listing. NYC approved (#49192).

WARRANTY — Fixture guaranteed for one year against mechanical defects in manufacture. System lamp (24 months) and ballast (60 months) warranty is provided by lamp and ballast manufacturer.

Protected by one or more of US Patent Nos. 7,229,192; D541,467; D541,468; D544,633; D544,634; D544,992; D544,933 and additional patents pending.

Specifications subject to change without notice.

| |
|----------------|
| Catalog Number |
| Notes |
| Type |



RELIGHT

Relight Volumetric Lighting

2RT5RT



FLUORESCENT

2' X 2' Relight
2 Lamp

SIMPLY5
LIGHTING INTELLIGENCE

Specifications

Intended to be installed in any existing parabolic recessed fixture:

Weight: 11 lbs.

ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

Example: 2RT5RT 24T5HO MVOLT GEB10PS

| Series | Lamp type | Voltage | Ballast | Options |
|-------------------------------|--|---|---|---|
| 2RT5R Recessed relight | 14T5 14 W T5 (22") 24T5HO 24 W T5 (22") | MVOLT ² 347 ³ | GEB95 0.95 ballast factor GEB95S 0.95 ballast factor, step dimming GEB115 1.15 ballast factor GEB115S 1.15 ballast factor, tep dimming GEB10PS 1.0 ballast factor, program start S5 0.95 ballast factor, SIMPLY 5 system ballast ² S5115 1.15 ballast factor, SIMPLY 5 system ballast ² | JP_ Job packaging - 16 or 32 kits HW Hard wired system for SIMPLY5 |

Notes

- For T5HO and GEB10PS only.
- MVOLT (120-277 volts), 50-60HZ.
- Use GEB95S for 14T5; use GEB10PS for 24T5HO.
- For 24T5HO only.

2RT5RT Volumetric Recessed Lighting 2' x 2'


| ENERGY AND LIGHT LEVEL COMPARISON | | | | | | | |
|---|-------------|-------------|----------|-------------|-----------|---------------------|------|
| System | Light level | Input watts | Watts/SF | Watts saved | % Savings | \$ Savings per year | LER |
| Parabolic, (2) 2700 lumen U 32W T8 lamps .88 bf | 47 | 59 | 0.92 | Base | Base | Base | 51.5 |
| RT5RT, (2) 1200 lumen T5 lamps, 1.15 bf | 27 | 37 | 0.49 | 22 | 37% | \$7.04 | 63.7 |

Light level in footcandles is calculated based on 8x10 mounting centers, 9 foot ceilings, 60 x 60 room, 80/50/20 reflectances, .95 LLD, .90 LDD, horizontal light level on 2.5 foot work-plane height.

Annual savings based on 4000 operating hours, \$.08/kwh. Luminaire Efficacy Rating (LER) is fixture lumen output divided by fixture input wattage.

FIT COMPATIBILITY

The RT5™ relight assembly (RT5R) was engineered to upgrade parabolic fixtures from all major manufacturers conforming to the following dimensions:

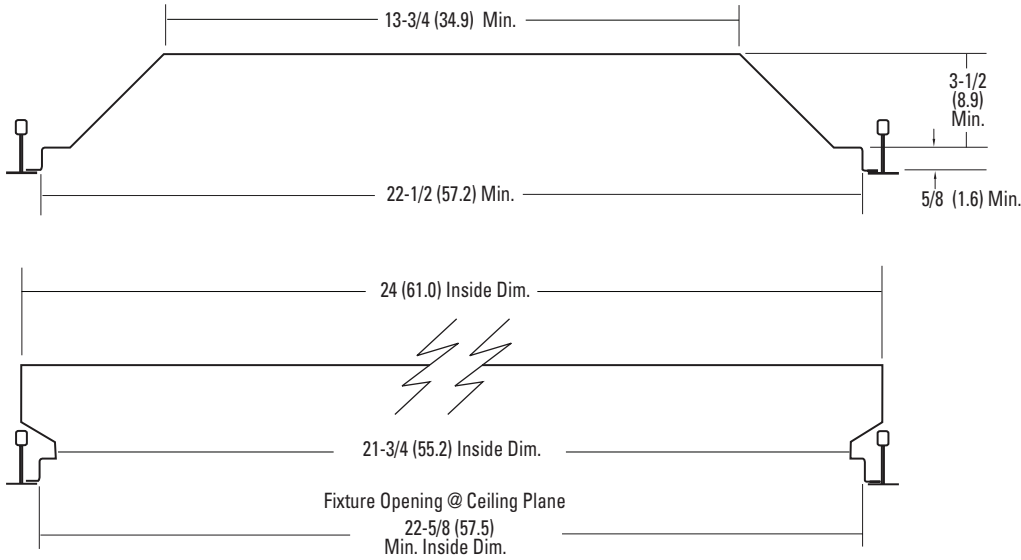

Dimensions are inches (centimeters).

Relight assemblies also will upgrade many existing "deep" lensed troffers conforming to these dimensions.

Relight assemblies will not upgrade "contractor-grade" lensed troffers or lensed troffers previously upgraded with parabolic renovator kits.

In addition to conforming to the dimensions above, Lithonia Lighting recommends a trial installation prior to purchasing project quantities.