

FEATURES

REFLECTOR

- Self-flanged, specular clear, semi-diffuse or highly specular reflector.

HOUSING

- Aluminum housing with top reveal for floating luminaire appearance. Provided with safety chain between reveal and housing on surface and pendant units for hands free wiring connections. Matte white textured polyester powder paint finish standard.

MOUNTING

- Standard ceiling mount provided with mounting pattern for direct installation to 3-1/4" and 4" octagonal or 4" square junction box.
- Optional wall mount provided with mounting pattern for direct installation to 4" square or octagonal junction box.
- Optional pendant mounting entry provided for 3/8" National Pipe Thread stem. Mounting accessories available (see options).


ELECTRICAL SYSTEM

- Horizontally-mounted, positive latch thermoplastic socket.
- Class P (GEB10), thermally-protected, high power factor electronic ballast.

LISTING

- Fixtures are UL Listed for damp locations. Listed and labeled to comply with Canadian Standards.

Type Catalog number

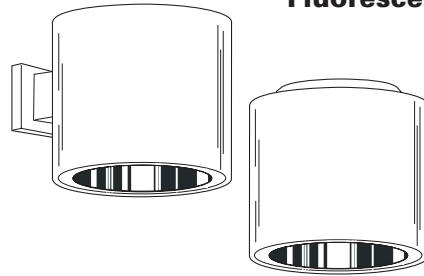


Fluorescent Surface Downlights

11" CF

Cylinders


Horizontal Lamp
Triple Tube

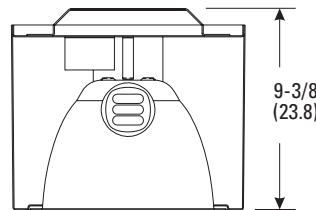

Reflector Aperture: 8 (20.3)
Housing Diameter: 10-3/4 (27.3)

All dimensions are inches (centimeters).

A = 4-5/8 (11.7)
B = 5-5/16 (13.5)
C = 3-1/4 (8.3)
D = 14 (35.6)
Wall Mount Dimensions

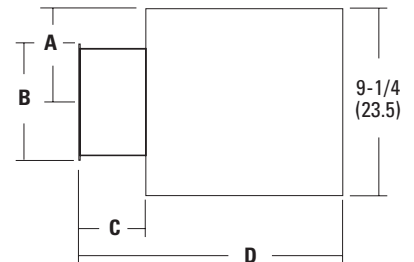

ORDERING INFORMATION

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line.

Example: **CF11 1/26TRT 8AR 120 GEB10 WLP DWHG**

CF11		GEB10		Options		
Series	Reflector color	Finish	Volt	Ballast*		
CF11	8AR Clear 8PR Pewter 8WTR Wheat 8UBR Umber 8GR¹ Gold	(blank) Semi-specular LD Matte-diffuse LS Specular	120 277 347	GEB10 Electronic ballast. *Ballast must be specified	GMF Single slow-blow fuse WM Wall mount PM Pendant 3/8" thread mount <i>Shipped Separately</i> CYS² 3/8" stem and canopy with 5° "hang straight" swivel CRS² 3/8" stem and canopy with 45° swivel WLP With 3500°K lamp	Architectural Colors (powder finish) ³ Standard Colors DWHG Matte white (standard) DDB Dark bronze DBL Black DWH Gloss white Classic Colors DMB Medium bronze DNA Natural aluminum DSS Sandstone DGC Charcoal gray DTG Tennis green DBR Bright red DSB Steel blue
Wattage/lamp						
1/18TRT One 18W triple tube						
1/26TRT One 26W triple tube						
1/32TRT One 32W triple tube						
1/42TRT One 42W triple tube						

NOTES

- 1 Not recommended for use with compact fluorescent lamps, consult factory.
- 2 Pendant mount units. Length of stem must be specified (from 6" to 48" in 6" increments). Ceiling attachment for interior use. Consult factory for exterior use. Stem and cylinder color will match when ordered as option. Stem will be black if ordered as separate line item.
- 3 Additional architectural colors available; please see brochure 794.3.

